


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

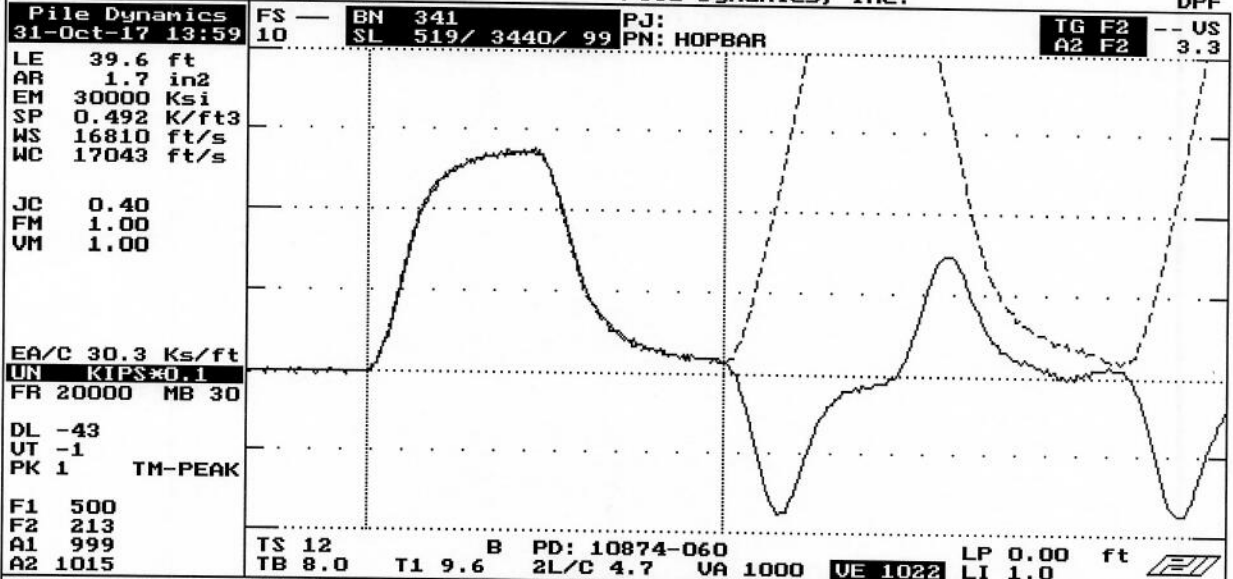

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.5 FMX= 69 AMX= 129
	EMX= 0.3 MEX= 135 FUP= 1.00
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 10874
	CALIBRATION FACTOR: 1015 g/v
	PAK (*5000): DATE: 31OCT17
	PDA OPERATOR: <i>Oran</i>
<-AT:PIEZORESISTIVE	OP: laine lver:4.051
	AT:PIEZOELECTRIC->