


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

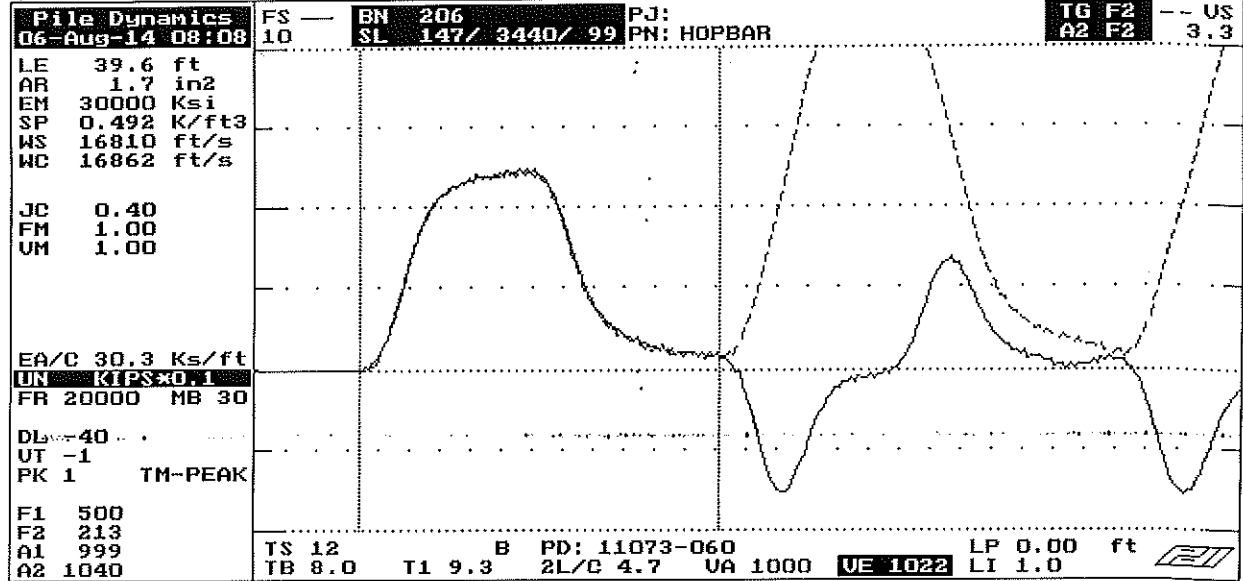

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.0 FMX= 62 AMX= 129 EMX= 0.3 MEX= 121 FUP= 1.00
-----------------------------	--

<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	<p>ACCELEROMETER CALIBRATION N.I.S.T. Traceable</p> <p>SERIAL NUMBER: <u>11073</u></p> <p>CALIBRATION FACTOR: <u>1040 %</u></p> <p>PAK (*5000): _____ DATE: <u>6AUG14</u></p> <p>PDA OPERATOR: <u>A. M. W.</u></p>
	<p><-AT:PIEZORESISTIVE OP: Iaine Iyer:4.051 AT:PIEZOELECTRIC-></p>