

File Dynamics	FS —	BN 12	PJ:	TG F2 -- US
11-May-04 09:35	10	SL 2488/ 3440/ 99	PN: HOPBAR	A2 F2 3.3


LE 39.6 ft
 AR 1.7 in2
 EM 30000 Ksi
 SP 0.492 K/ft3
 WS 16810 ft/s
 WC 16862 ft/s

JC 0.40
 FM 1.00
 UM 1.00

EA/C 30.3 Ks/ft
 UN ~~31PSE:0P3~~
 FR 20000 MB 30

DL -42
 UT -1
 PK 1 TM-PEAK

F1 500
 F2 213
 A1 999
 A2 1025

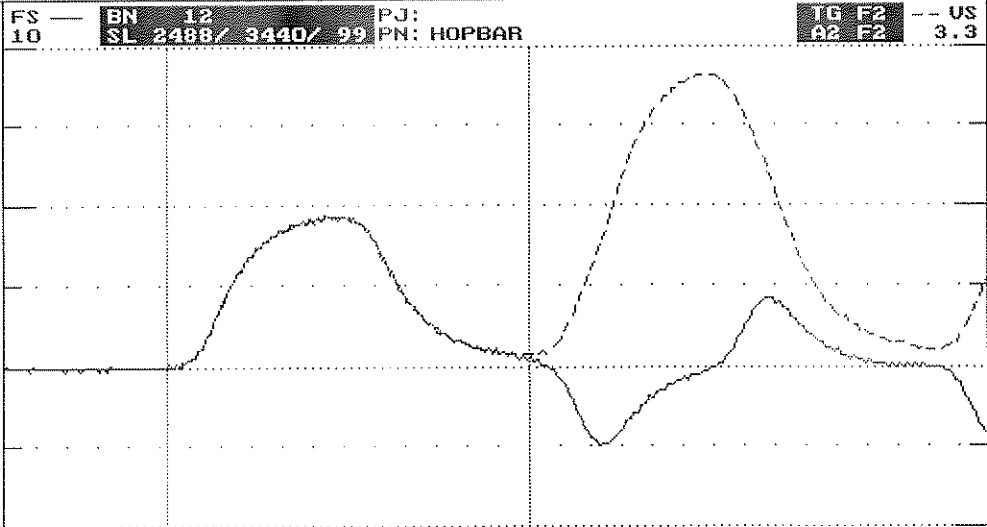

TS 12 E B PD: 11074 LP 0.00 ft
 TB 7.0 T1 9.1 2L/C 4.7 UA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 3.0	FMX= 47	AMX= 90
	EMX= 0.1	MEX= 92	FUP= 1.00



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: 11074
 CALIBRATION FACTOR: 1025 G/V
 PAK (*3666) DATE: 11 May 04
 PDA OPERATOR: *[Signature]*