

File Dynamics
22-Nov-10 15:51

FS 10

BN 259
SL 2899/ 3440/ 99

PJ: sn
PN: HOPBAR

TG F2 -- US
A2 F2 3.3


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS:0.1
FR 20000 MB 30

DL -38
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 1015

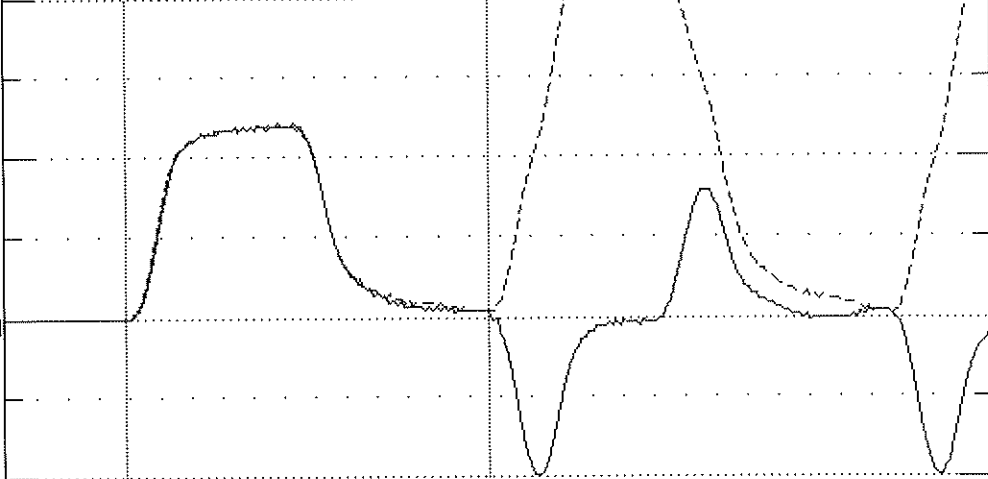

TS 12 B PD: 11148-060 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 UA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

UMX= 4.0 FMX= 60 AMX= 159
EMX= 0.2 MEX= 117 FUP= 1.00



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
SERIAL NUMBER: 11148
CALIBRATION FACTOR: 1015 G/V
PAK (*5000): DATE: 22-NOV-10
PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: alex [ver:4.05]

AT:PIEZOELECTRIC->