


OBTA: DN [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

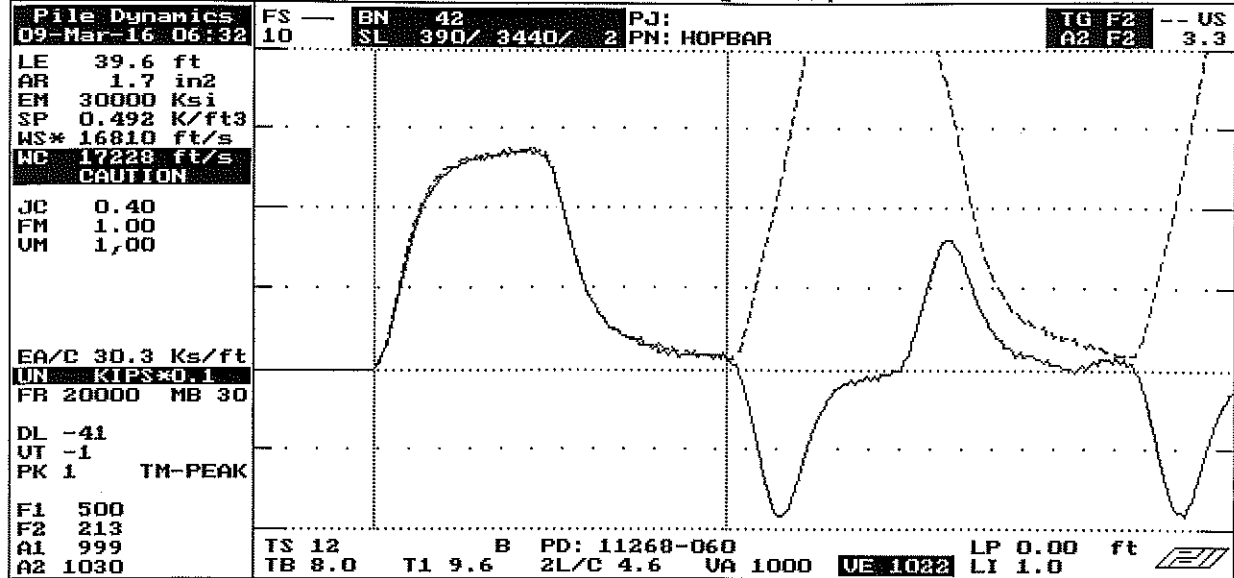

ACCEPT SQ-OFF FL-OFF PR-OFF

UMX= 4.5 FMX= 69 AMX= 149
 EMX= 0.3 MEX= 135 FVP= 0.97



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 11268

CALIBRATION FACTOR: 1030 %

PAK (*5000): DATE: 9 MAR 16

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE OP: laine Iver:4.051 AT:PIEZOELECTRIC->