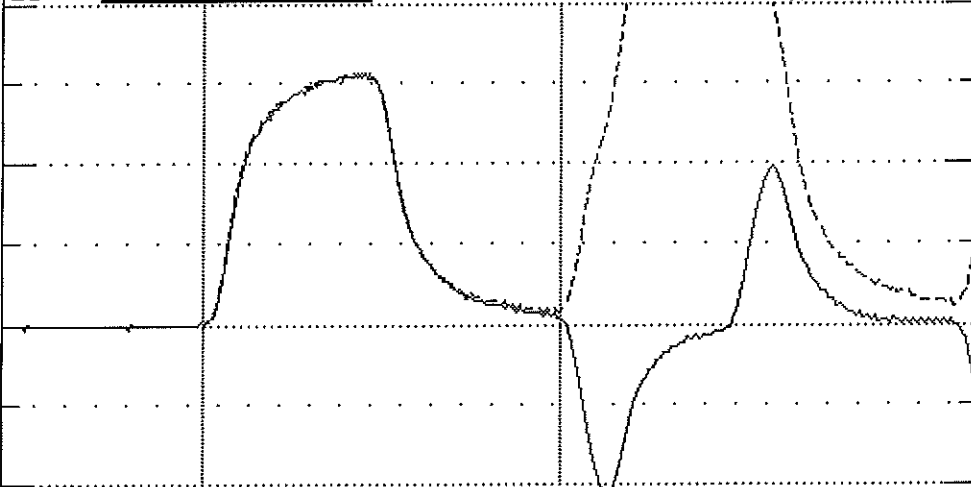



QBTA: ON [ALT-F1/BB=60]

File Dynamics, Inc.

DPF

File Dynamics 08-Jul-04 07:32 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS*0.1 FR 20000 MB 30 DL -39 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1065	FS — BN 654 PJ: 10 SL 2585/ 3440/ 99 PN: HOPBAR TG F2 -- US A2 F2 3.3  TS 12 B PD: 11408 LP 0.00 ft TB 7.0 T1 9.6 2L/C 4.7 VA 1000 UE 1024 LI 1.0
---	--

ACCEPT SQ-OFF FL-OFF PR-OFF  contact File Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 5.1 FMX= 78 AMX= 179 EMX= 0.4 MEX= 152 FUP= 0.99 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>11408</u> CALIBRATION FACTOR: <u>1065 G/V</u> PAK (3000) : _____ DATE: <u>08-Jul-04</u> PDA OPERATOR: <u>Fred Iver</u>
---	--

<-AT:PIEZORESISTIVE

OP: FRED Iver:4.051

AT:PIEZOELECTRIC->