


Pile Dynamics 27-Jun-08 15:29 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft LN KIPSS0 FR 20000 MB 30 DL -44 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1020	FS 10 BN 341 SL 2758/ 3440/ 99 PJ: sn PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 TB 8.0 B PD: 11503-060 T1 9.1 2L/C 4.7 LP 0.00 ft LI 1.0
---	---



ACCEPT SQ-OFF FL-OFF PR-OFF
 VMX= 3.9 FMX= 60 AMX= 100
 EMX= 0.2 MEX= 117 FVP= 0.99

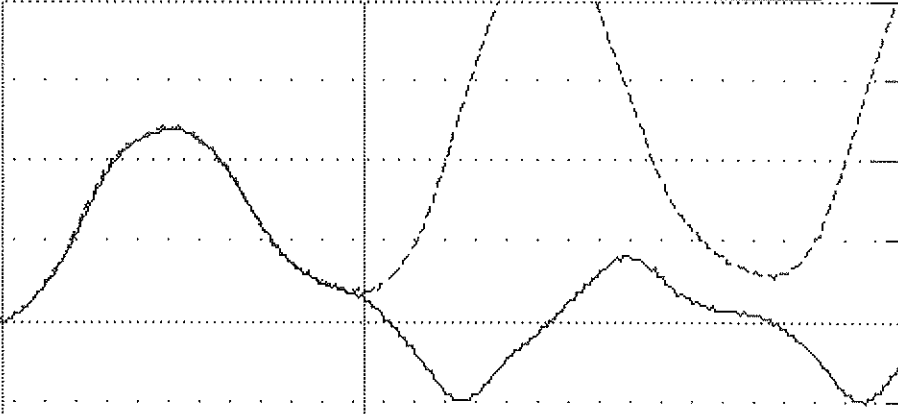

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: 11503
 CALIBRATION FACTOR: 1020 G/V
 PAK (*5000): _____ DATE: 27-JUN-08
 PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: alex [ver:4.05]

AT:PIEZOELECTRIC->

