


Pile Dynamics 27-Jun-08 15:26 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 MS 16810 ft/s MC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN RTS-01 FR 20000 MB 30 DL -43 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1020	FS — BN 337 PJ: sn 10 SL 2758/ 3440/ 99 PN: HOPBAR TS 12 B PD: 11504-060 LP 0.00 ft TB 8.0 T1 9.0 2L/C 4.7 VA 1000 UE 1022 LI 1.0	TG F2 -- US A2 F2 3.3
--	--	--------------------------



ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 3.7 FMX= 59 AMX= 100
 EMX= 0.2 MEX= 115 FVP= 0.98

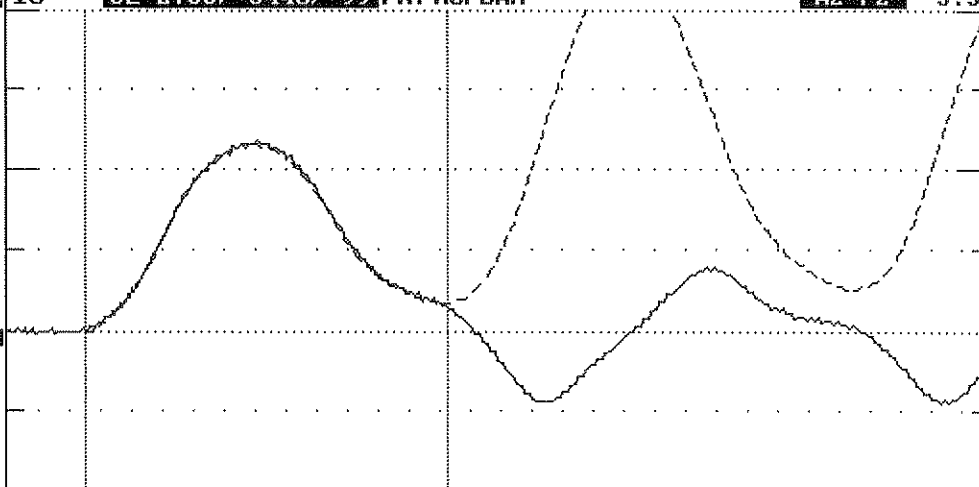

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 11504

CALIBRATION FACTOR: 1020 g/v

PAK (*5000): DATE: 27-JUN-08

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: alex [ver:4.05]

AT:PIEZOELECTRIC->

