


File Dynamics 30-Sep-04 07:13 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS=0 FR 20000 MB 30 DL -40 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1012	FS — 10 BN 694 SL 2631/ 3440/ 99 PJ: PN: HOPBAR TG F2 -- US A2 F2 3.3 
TS 12 S B PD: 11513 LP 0.00 ft TB 8.0 T1 9.4 2L/C 4.7 UA 1000 UE-1024 LI 1.0	

~~ACCEPT~~ SQ-OFF FL-OFF PR-OFF
 VMX= 3.5 FMX= 55 AMX= 110
 EMX= 0.2 MEX= 107 FUP= 1.02

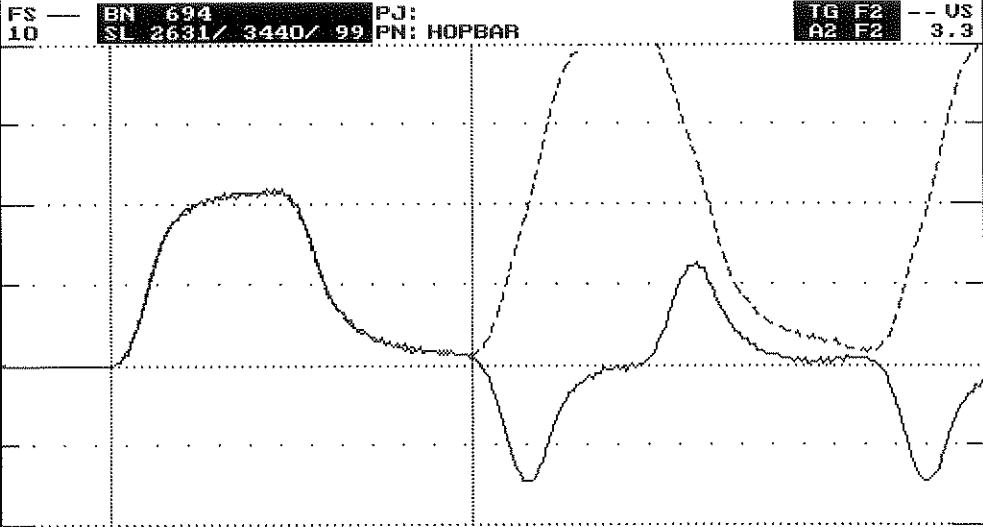

contact File Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: 11513
 CALIBRATION FACTOR: 1012 G/Y
~~RAK~~ (*5000): _____ DATE: 30 Sept. 04
 PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: DAVE [ver:4.05]

AT:PIEZOELECTRIC>