



Pile Dynamics 16-Nov-04 12:08 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 VM 1.00 EA/C 30.3 Ks/ft UN KIPS=0.1 FR 20000 MB 30 DL -38 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1040	FS — BN 580 10 SL 2540/ 3440/ 99 PJ: PN: HOPBAR TG F2 -- US #2 F2 3.3 TS 12 B PD: 12545-060 LP 0.00 ft TB 7.0 T1 9.5 2L/C 4.7 VA 1000 UE 1024 LI 1.0
--	--

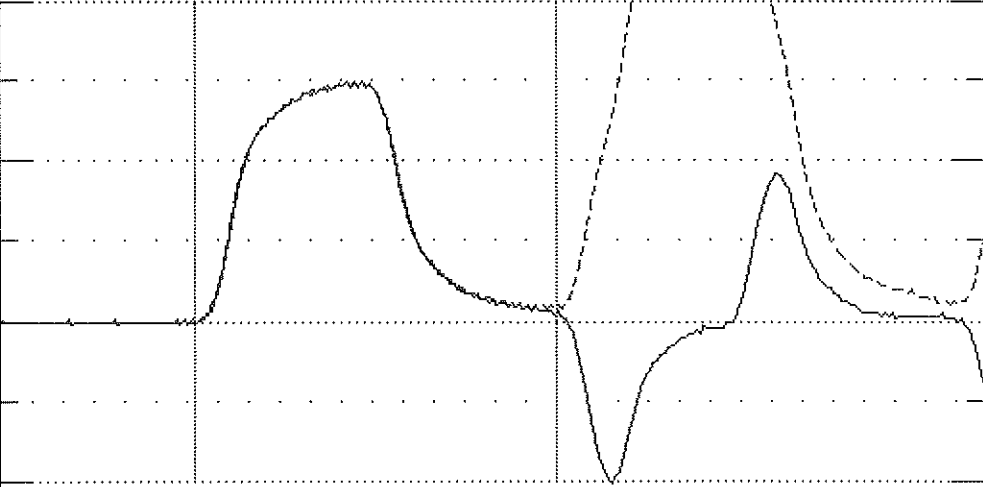

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 4.8 FMX= 75 AMX= 159
 EMX= 0.3 MEX= 147 FVP= 0.99



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 12545

CALIBRATION FACTOR: 1040 G/V

PAK (<5000>): _____ DATE: 16-Nov-04

PDA OPERATOR: Fred Houser