


File Dynamics 28-Oct-04 13:01 LE 39.6 ft AR 1.7 in ² EM 30000 Ksi SP 0.492 K/ft ³ WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS 30.3 FR 20000 MB 30 DL -37 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1040	FS 10 BN 187 SL 2528/ 3440/ 99 PJ: PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: 12557 LP 0.00 ft TB 8.0 T1 9.3 2L/C 4.7 UA 1000 UE 1022 LI 1.0
--	--



ACCERT SQ-OFF FL-OFF PR-OFF
 UMX= 3.8 FMX= 59 AMX= 129
 EMX= 0.2 MEX= 115 FUP= 1.02

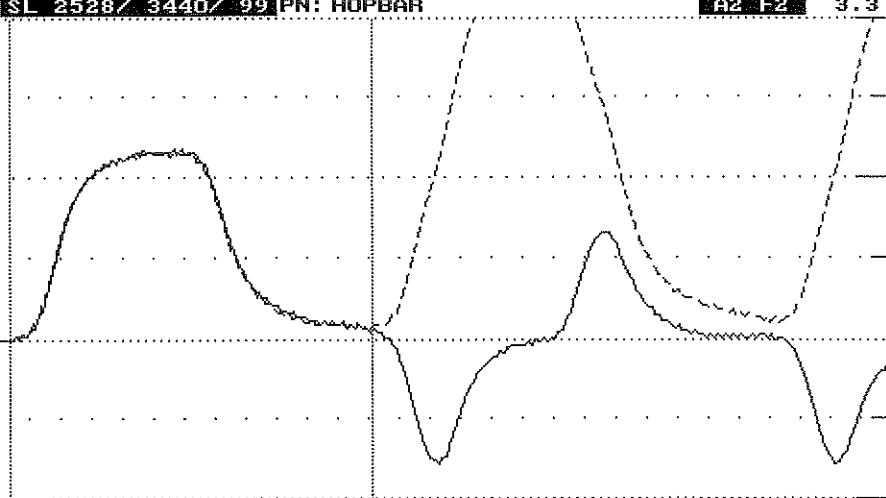

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
 SERIAL NUMBER: 12557
 CALIBRATION FACTOR: 1040 G/Y
 PAK (*5000)*: DATE: 28 Oct 04
 PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: FRED [ver:4.05]

AT:PIEZOELECTRIC->