



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics 25-Jan-05 08:11 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS*0.1 FR 20000 MB 30 DL -41 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1026	FS — BN 24 10 SL 2486/ 3440/ 2 PJ: PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 E B PD: 13415 LP 0.00 ft TB 7.0 T1 9.3 2L/C 4.7 UA 1000 VE 1022 LI 1.0
---	---

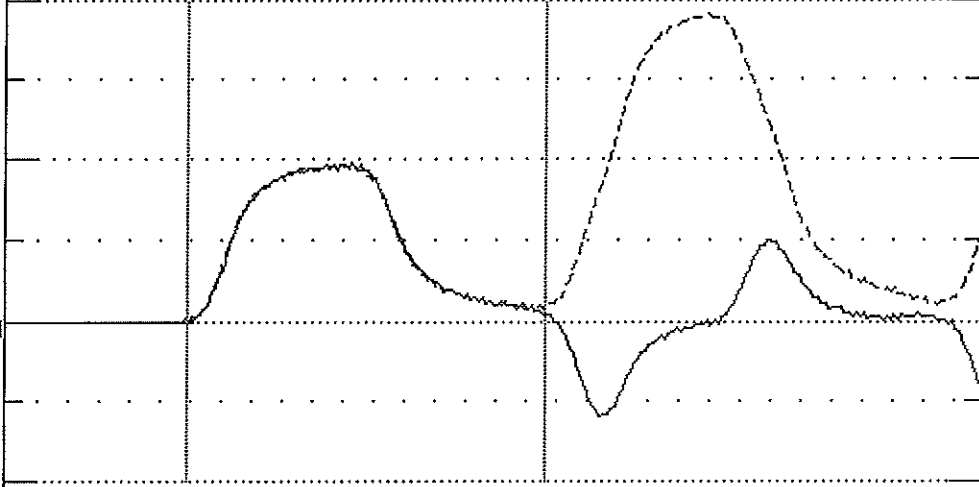

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 3.2 FMX= 49 AMX= 100 EMX= 0.1 MEX= 96 FVP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 13415 CALIBRATION FACTOR: 1026 G/V PAK (*3088): DATE: 25 Jan 05 PDA OPERATOR: <i>[Signature]</i> OP: Dave Iver:4.051
--	--

<-AT:PIEZORESISTIVE

AT:PIEZOELECTRIC->