



File Dynamics 24-Jan-05 06:24 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS 0.1 FR 20000 MB 30 DL -38 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1028	FS 10 BN 916 SL 2592/ 3440/ 99 PJ: PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: 13419 LP 0.00 ft TB 7.0 T1 9.4 2L/C 4.7 VA 1000 UE 1022 LI 1.0
---	---

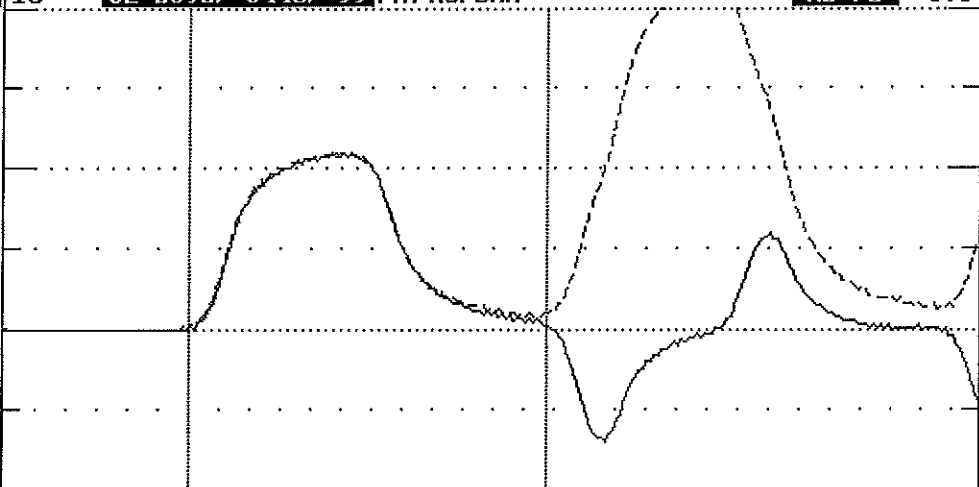

ACCEPT SQ-OFF FL-OFF PR-OFF  contact File Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 3.6 FMX= 56 AMX= 110 EMX= 0.2 MEX= 109 FUP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>13419</u> CALIBRATION FACTOR: <u>1028 G/V</u> PAK (#3000) : _____ DATE: <u>24 Jan 05</u> PDA OPERATOR: <u>[Signature]</u> DP: DAVE [ver:4.05]
---	--

<-AT:PIEZORESISTIVE

AT:PIEZOELECTRIC->