



QBTA: ON [ALT-F1/BB=601

File Dynamics, Inc.

DPF

File Dynamics 01-Feb-05 06:54 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS*0.1 FR 20000 MB 30 DL -42 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1031	FS — BN 337 10 SL 2522/ 3440/ 2 PJ: PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 B PD: 13538 LP 0.00 ft TB 7.0 T1 9.2 2L/C 4.7 UA 1000 VE 1022 LI 1.0
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

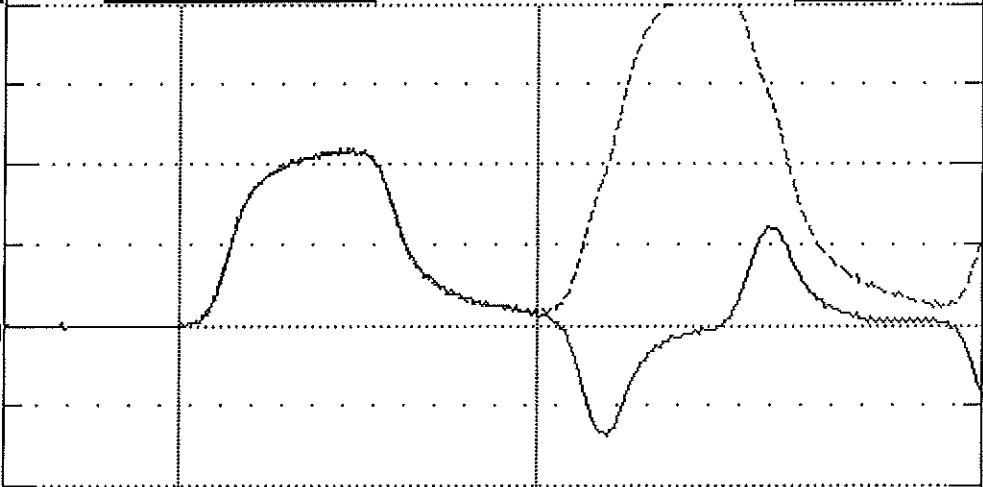

ACCEPT SQ-OFF FL-OFF PR-OFF  contact File Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 3.5 FMX= 55 AMX= 110 EMX= 0.2 MEX= 107 FVP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 13538 CALIBRATION FACTOR: 10316/V PAR (*3000): DATE: 1 Feb. 05 PDA OPERATOR: <i>[Signature]</i>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<-AT:PIEZORESISTIVE OP: DAVE [ver:4.05] AT:PIEZOELECTRIC->