



OBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

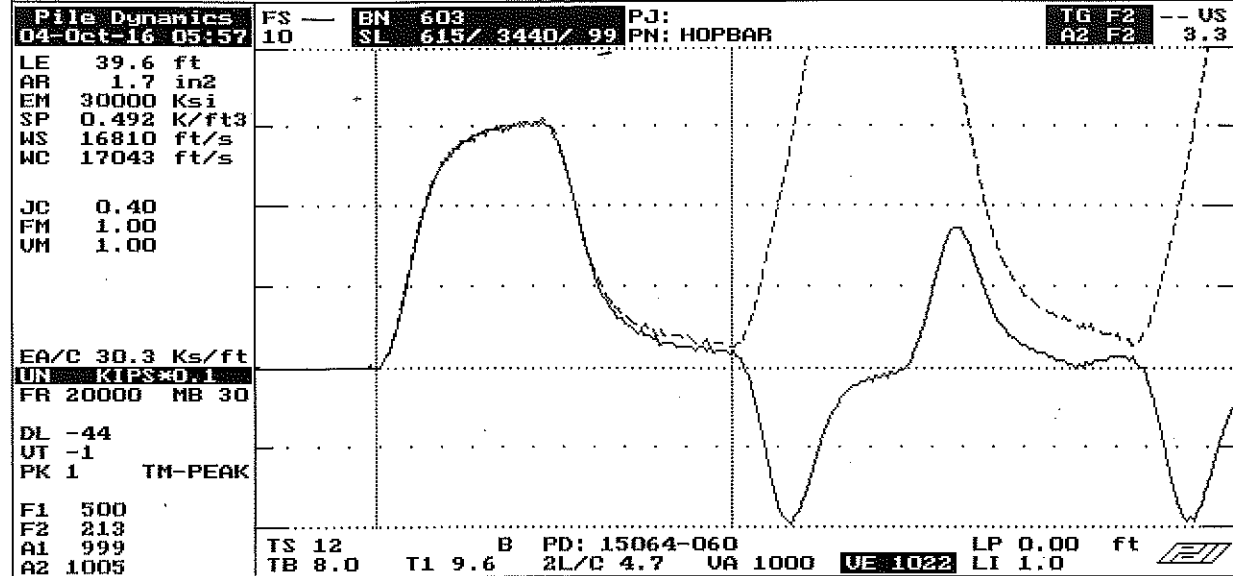

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 5.0 FMX= 77 AMX= 149
	EMX= 0.4 MEX= 150 FUP= 0.99
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 15064 CALIBRATION FACTOR: 1005 % PAK (*5000): DATE: 600716 PDA OPERATOR: <i>[Signature]</i>

<-AT:PIEZORESISTIVE OP: laine [ver:4.05] AT:PIEZOELECTRIC->