



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

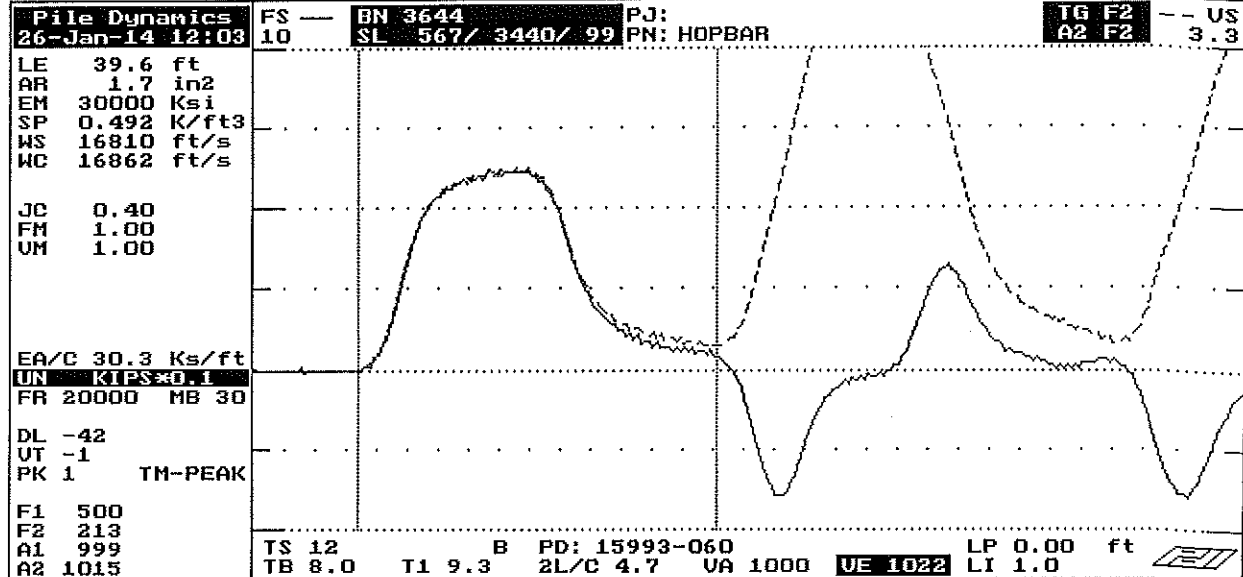

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 4.0 FMX= 62 AMX= 120 EMX= 0.2 MEX= 121 FVP= 0.99 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 15993 CALIBRATION FACTOR: 1015 G/V PAK (*5000): DATE: 27 JAN 14 PDA OPERATOR: <i>[Signature]</i>
--	--

<-AT:PIEZORESISTIVE

OP: LAINE Iver:4.05]

[AT:PIEZOELECTRIC->