



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics 22-Sep-05 09:56 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s JC 0.40 FM 1.00 UM 1.00 EA/C 30.3 Ks/ft UN KIPS*0.1 FR 20000 MB 30 DL -45 UT -1 PK 1 TM-PEAK F1 500 F2 213 A1 999 A2 1015	FS — BN 290 10 SL 2494/ 3440/ 99 PJ: PN: HOPBAR TG F2 -- US A2 F2 3.3 TS 12 E B PD: 16010-060 LP 0.00 ft TB 7.0 T1 9.4 2L/C 4.7 VA 1000 VE 1022 LI 1.0
---	---

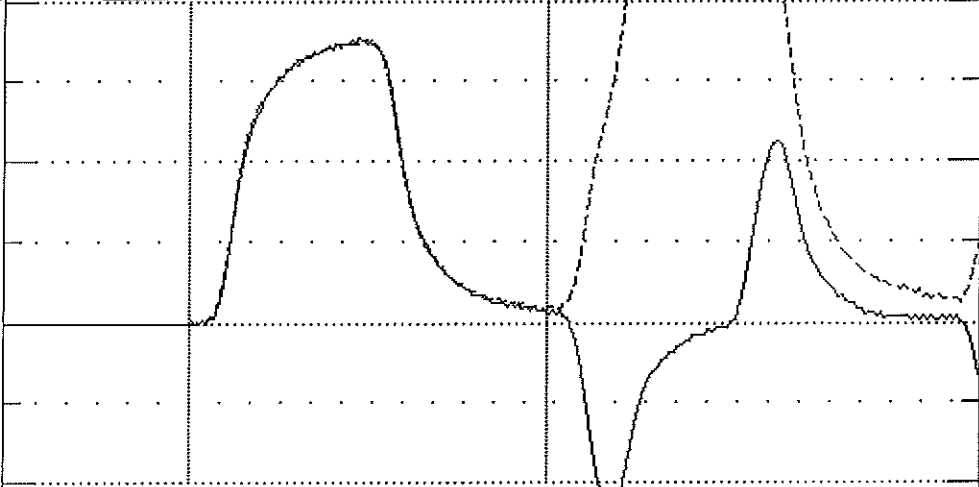

ACCERT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 5.7 FMX= 88 AMX= 199 EMX= 0.5 MEX= 172 FVP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 16010 CALIBRATION FACTOR: 1015 G/V PAR (<X5000>): _____ DATE: 22-Sep-05 PDA OPERATOR: <i>JM Hain</i> <-AT:PIEZORESISTIVE OP: FRED [ver:4.05] AT:PIEZOELECTRIC->
---	--