


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

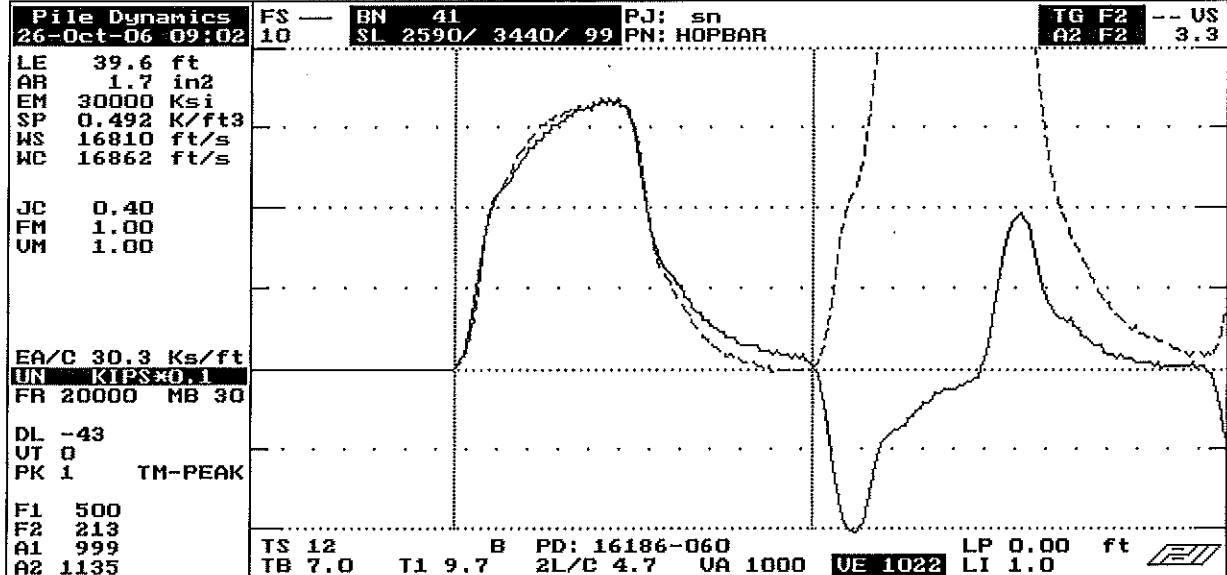

| | |
|---|---|
| ACCEPT SQ-OFF FL-OFF PR-OFF contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916 | UMX= 5.6 FMX= 84 AMX= 219 EMX= 0.4 MEX= 164 FUP= 0.98 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>16186</u> CALIBRATION FACTOR: <u>1135 G/V</u> PAK (#5000): _____ DATE: <u>26-OCT-06</u> PDA OPERATOR: <u>[Signature]</u> |
|---|---|

<-AT:PIEZORESISTIVE

OP: DAVE [ver:4.05]

AT:PIEZOELECTRIC->