

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
2018-01-26 11:18

FS — BN 358
10 SL 569/ 3440/ 99

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3


LE 17.0 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 7312 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -41
UT -1 IP 0.00
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 1040

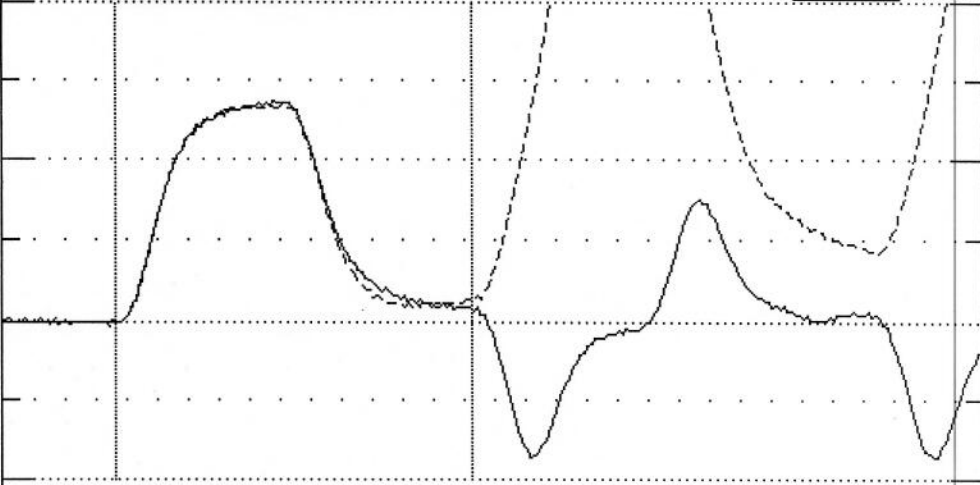

TS 12 E B PD: 16209-060 LP 0.00 ft
TB 8.0 T1 9.4 2L/C 4.7 UA 1000 UE 1024 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF
VMX= 11.1 FMX= 69 AMX= 149
EMX= 0.4 MEX= 135 FUP= 1.00

ACCEPT

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
SERIAL NUMBER: 16209
CALIBRATION FACTOR: 1040 g/V
PAK (*5000): DATE: 26 JAN 18
PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine lver:5.011

AT:PIEZOELECTRIC->