

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
 2018-06-08 12:45

LE 17.0 ft
 AR 1.7 in2
 EM 30000 Ksi
 SP 0.492 K/ft3
 WS 16810 ft/s
 WC 7312 ft/s

FS 10
 BN 3911
 SL 1732/ 3440/ 99


PJ: TG F2 -- US
 PN: HOPBAR A2 F2 3.3

JC 0.40
 FM 1.00
 UM 1.00

EA/C 30.3 Ks/ft
 UN K12.337
 FR 20000 MB 90

DL -43
 UT -1 IP 0.00
 PK 1 1M-PEAK

F1 500
 F2 213
 A1 999
 A2 972

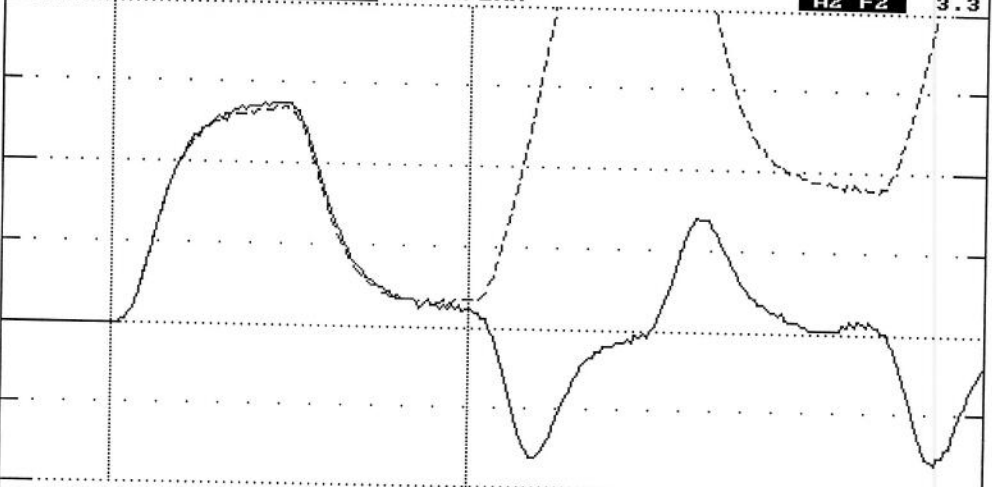

TS 12 B PD: 16220-060 LP 0.00 ft
 TB 8.0 T1 9.4 2L/C 4.7 VA 1000 UE 1024 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 7.1 FMX= 69 AMX= 129
 EMX= 0.3 MEX= 135 FVP= 1.02

ACCEPT

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 16220

CALIBRATION FACTOR: 972 %

PAK (*5000): DATE: 11 JUNE 18

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine lver:5.011

AT:PIEZOELECTRIC->