



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

<b>Pile Dynamics</b> 28-Oct-05 14:54 LE 39.6 ft AR 1.7 in2 EM 30000 Ksi SP 0.492 K/ft3 WS 16810 ft/s WC 16862 ft/s  JC 0.40 FM 1.00 VM 1.00  EA/C 30.3 Ks/ft UN <del>KIPS</del> *0.1 FR 20000 MB 30  DL -40 UT -1 PK 1 TM-PEAK  F1 500 F2 213 A1 999 A2 1025	FS — BN 1161 PJ: 10 SL 2602/ 3440/ 99 PN: HOPBAR  TG F2 -- US A2 F2 3.3  TS 12 B PD: 16234-60 LP 0.00 ft TB 7.0 T1 9.4 2L/C 4.7 VA 1000 VE 1022 LI 1.0
--	---

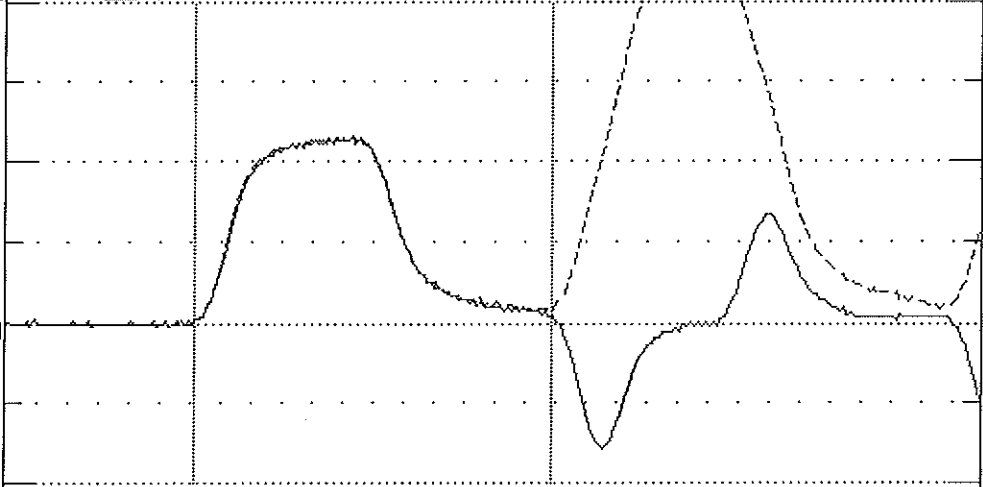

<b>ACCEPT SQ-OFF FL-OFF PR-OFF</b>    contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 3.7 FMX= 58 AMX= 120 EMX= 0.2 MEX= 113 FVP= 0.99  ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 16234 CALIBRATION FACTOR: 1025 G/V <del>PAK (*5000)</del> DATE: 28 Oct. 05 PDA OPERATOR: <i>[Signature]</i>
---	---

<-AT:PIEZORESISTIVE

OP: FRED [ver:4.05]

AT:PIEZOELECTRIC->