

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
 15-Mar-16 22:45
 LE 39.6 ft
 AR 1.7 in²
 EM 30000 Ksi
 SP 0.492 K/ft³
 WS 16810 ft/s
 WC 16684 ft/s

FS —
 10

BN 352
 SL 511/ 3440/ 99
 PJ:
 PN: HOPBAR

TG F2 -- US
 A2 F2 3.3


JC 0.40
 FM 1.00
 UM 1.00

EA/C 30.3 Ks/ft
 UN KIPS=0.1
 FR 20000 MB 30

DL -43
 UT -1
 PK 1 TM-PEAK

F1 500
 F2 213
 A1 999
 A2 920

TS 12 B PD: 10358-b75 LP 0.00 ft
 TB 8.0 T1 9.6 2L/C 4.8 VA 1000 UE 1022 LI 1.0

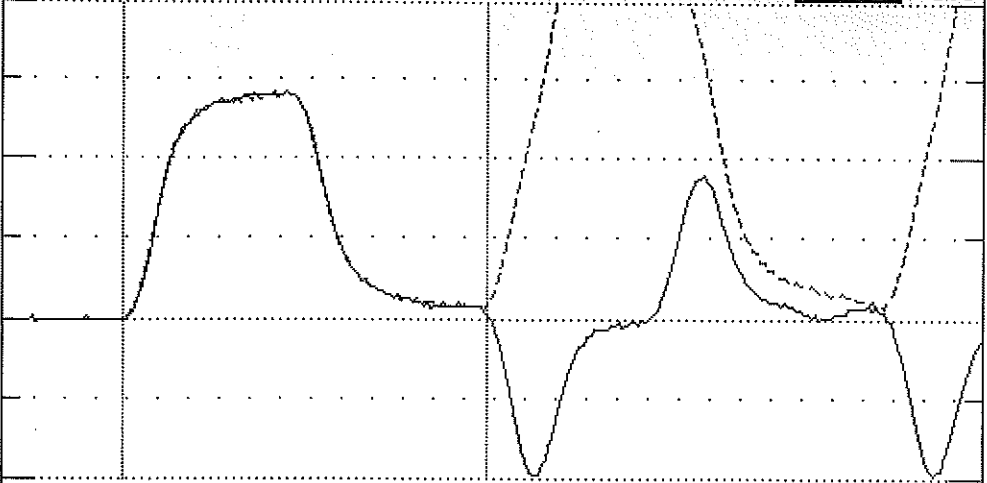

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

VMX= 4.6 FMX= 71 AMX= 159
 EMX= 0.4 MEX= 139 FVP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10358

CALIBRATION FACTOR: 920 %

PAK (*5000): DATE: 16MAR16

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->