

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
24-Aug-17 23:00

FS 10

BN 889
SL 719/ 3440/ 99

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 30

DL -42
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 915

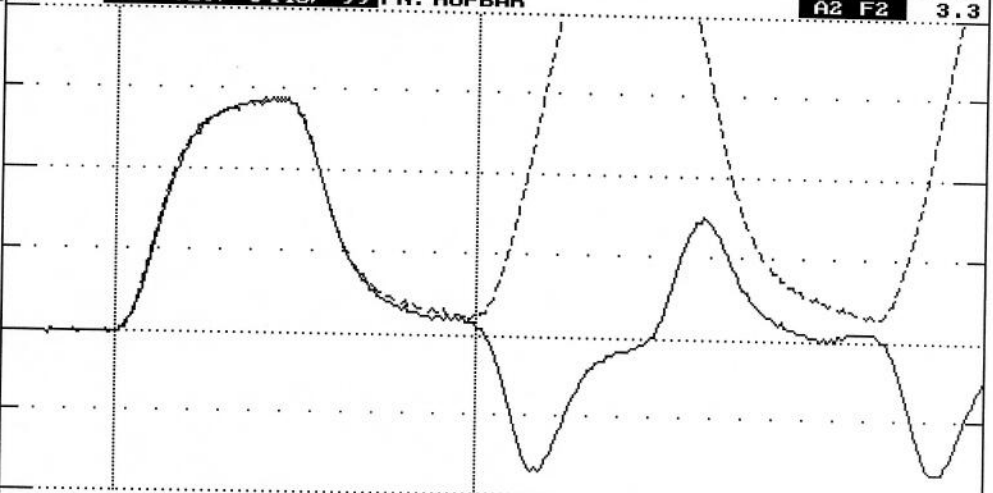

TS 12 B PD: 10445-b75 LP 0.00 ft
TB 8.0 T1 9.4 2L/C 4.7 UA 1000 VE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.7 FMX= 72 AMX= 139
EMX= 0.3 MEX= 141 FVP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
SERIAL NUMBER: 10445
CALIBRATION FACTOR: 915 %
PAK (*5000): DATE: 28AUG17
PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->