

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics  
25-Aug-17 02:45

FS —  
10

BN 945  
SL 729/ 3440/ 99

PJ:  
PN: HOPBAR

TG F2 -- US  
A2 F2 3.3


LE 39.6 ft  
AR 1.7 in2  
EM 30000 Ksi  
SP 0.492 K/ft3  
WS 16810 ft/s  
WC 16862 ft/s

JC 0.40  
FM 1.00  
UM 1.00

EA/C 30.3 Ks/ft  
UN KIPS\*0.1  
FR 20000 MB 30


DL -39  
UT -1  
PK 1 TM-PEAK

F1 500  
F2 213  
A1 999  
A2 985

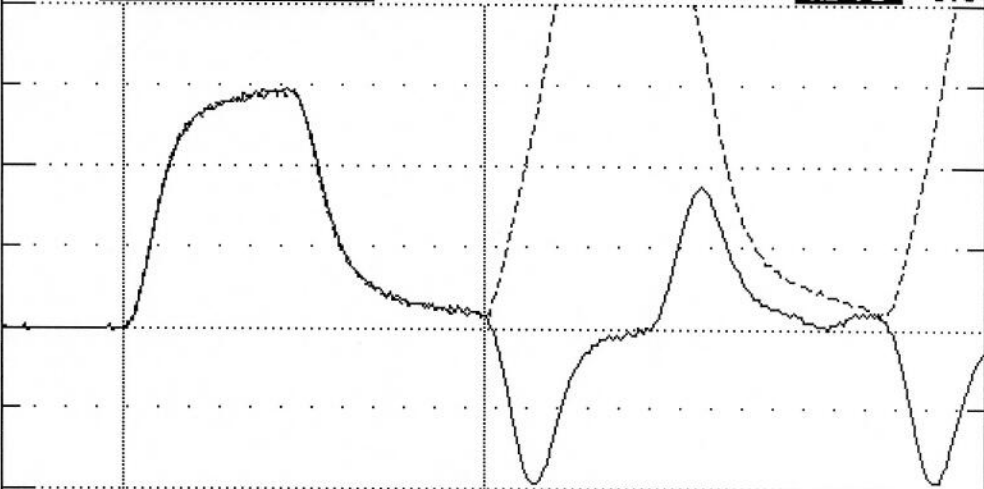

TS 12 E B PD: 10452-b75 LP 0.00 ft  
TB 8.0 T1 9.6 2L/C 4.7 VA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA  
with your questions  
tel USA - 216 - 831- 6131  
fax USA - 216 - 831- 0916

VMX= 4.7 FMX= 74 AMX= 149  
EMX= 0.4 MEX= 145 FUP= 0.99

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10452

CALIBRATION FACTOR: 985%

PAK (\*5000): DATE: 28 AUG 17

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->