


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

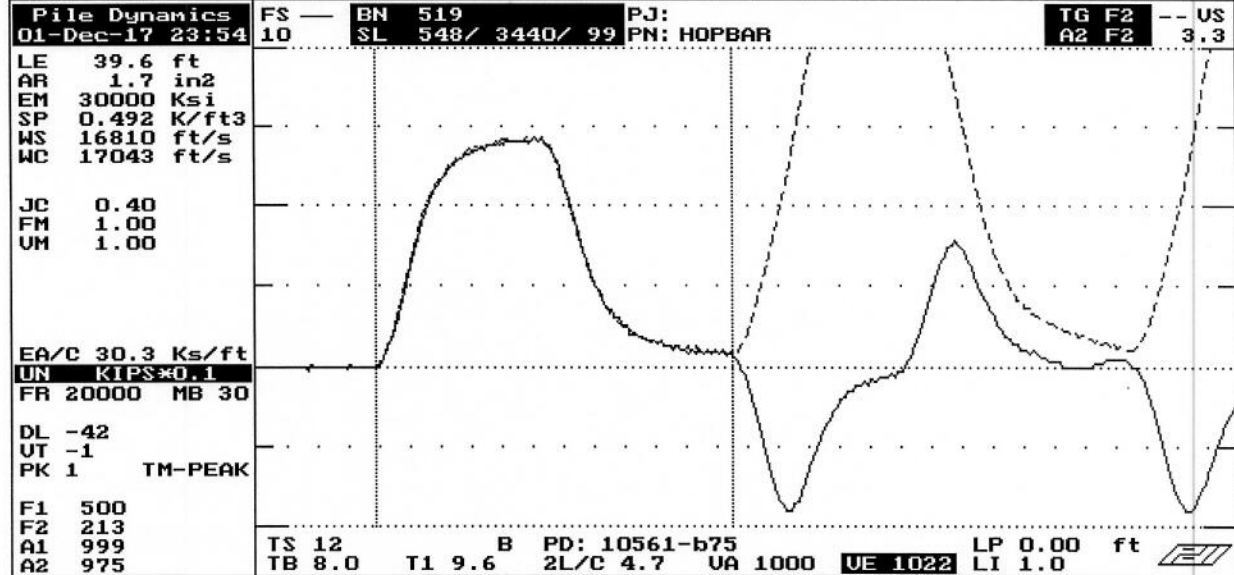

ACCEPT SQ-OFF FL-OFF PR-OFF

UMX= 4.6 FMX= 72 AMX= 139
 EMX= 0.3 MEX= 141 FUP= 1.01



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 10561

CALIBRATION FACTOR: 975%

PAK (*5000): DATE: 8DEC17

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine lver:4.051

AT:PIEZOELECTRIC->