


OBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

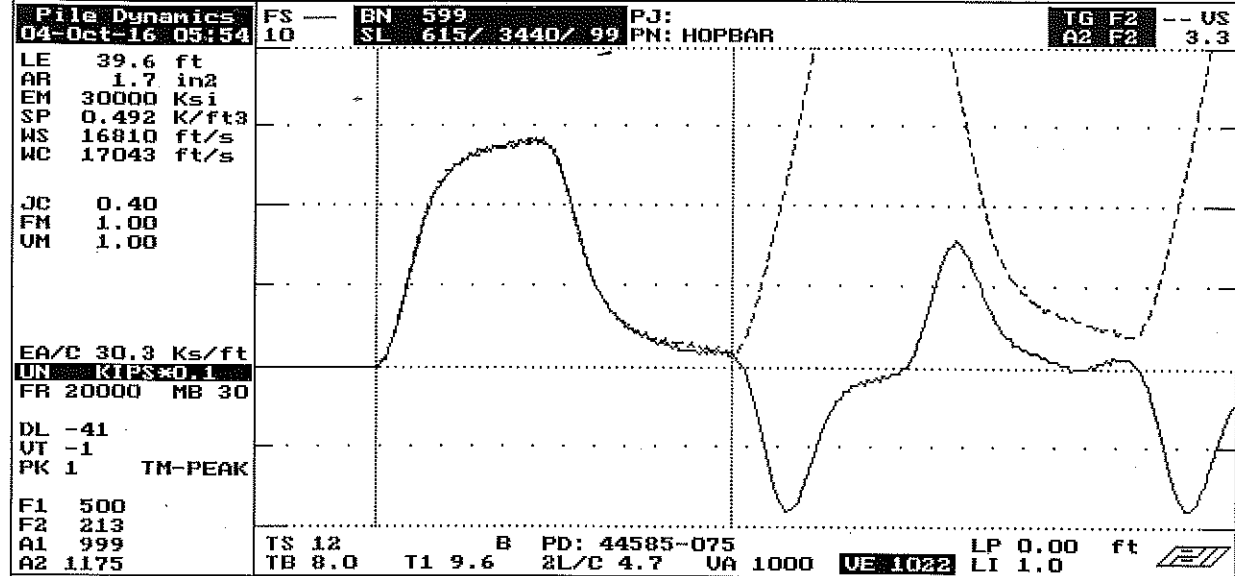

ACCEPT SQ-OFF FL-OFF PR-OFF

VMX= 5.0 FMX= 71 AMX= 139  
EMX= 0.3 MEX= 139 FUP= 1.00



contact Pile Dynamics USA  
with your questions  
tel USA - 216 - 831- 6131  
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 44585

CALIBRATION FACTOR: 1175 %

PAK (\*5000): DATE: 6 OCT 16

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->