

File Dynamics
2018-07-19 10:51

FS —
10

BN 5845
SL 849/ 3440/ 99

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3

LE 17.0 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 7312 ft/s


JC 0.40
FM 1.00
VM 1.00

EA/C 30.3 Ks/ft
UN KIPS*0.1
FR 20000 MB 90

DL -39
UT -1 IP 0.00
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 1125

TS 12 B PD: 47430-075 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 VA 1000 UE 1024 LI 1.0

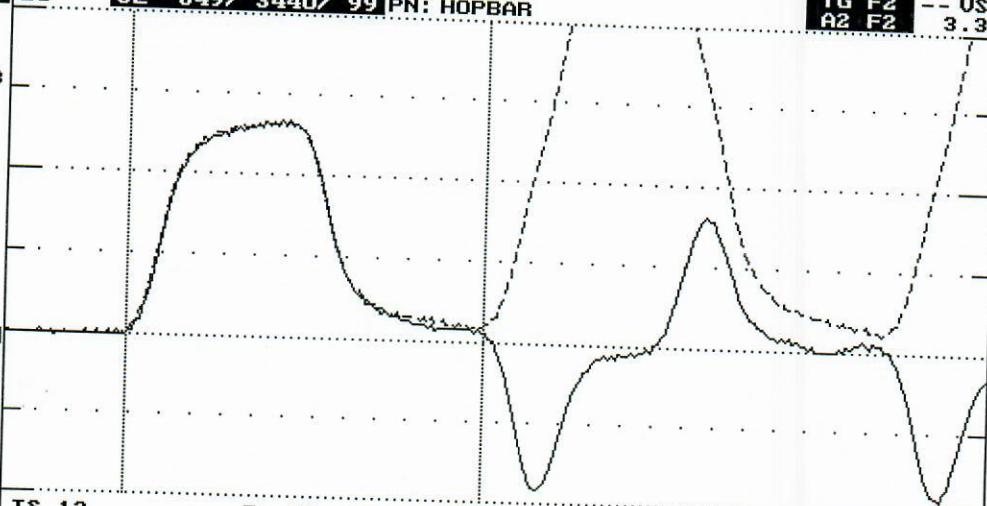

ACCEPT SQ-OFF FL-OFF PR-OFF

ACCEPT



<-AT:PIEZORESISTIVE

VMX= 5.0 FMX= 67 AMX= 139
EMX= 0.3 MEX= 131 FUP= 1.02

ACCELEROMETER CALIBRATION N.I.S.T. Traceable
SERIAL NUMBER: 47430
CALIBRATION FACTOR: 1125 %
PAK (*5000): DATE: 25 July 18
PDA OPERATOR: [Signature]

OP: laine lver:5.011

AT:PIEZOELECTRIC->