



QRTA: ON [ALT-F1/BB=601

Pile Dynamics, Inc.

DPF

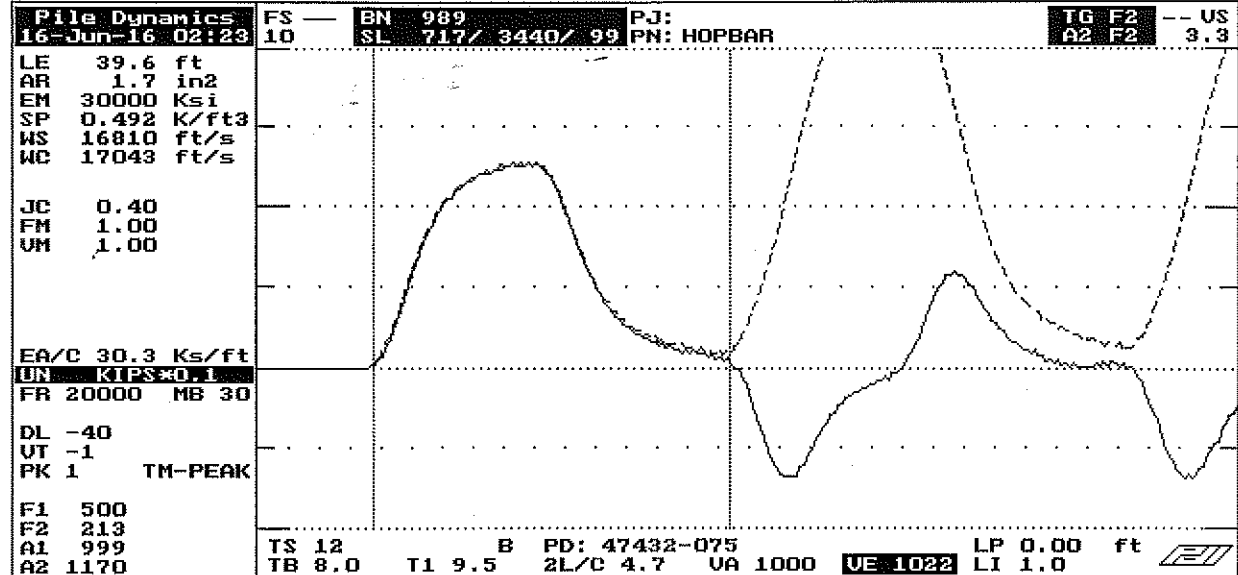

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.1 FMX= 64 AMX= 120
	EMX= 0.2 MEX= 125 FVP= 1.01
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable
contact Pile Dynamics USA with your questions	SERIAL NUMBER: <u>47432</u>
tel USA - 216 - 831- 6131	CALIBRATION FACTOR: <u>1170 %/V</u>
fax USA - 216 - 831- 0916	PAK-(<#000>): _____ DATE: <u>16JUNE16</u>
<-AT:PIEZORESISTIVE	PDA OPERATOR: <u>[Signature]</u>
	OP: laine [ver:4.05] AT:PIEZOELECTRIC->