


Pile Dynamics 20-Mar-14 06:58		FS —	BN 277	PJ:	TG F2 -- US
		10	SL 158/ 3440/ 99	PN: HOPBAR	A2 F2 3.3
LE 39.6 ft					
AR 1.7 in2					
EM 30000 Ksi					
SP 0.492 K/ft3					
WS 16810 ft/s					
WC 16862 ft/s					
JC 0.40					
FM 1.00					
UM 1.00					
EA/C 30.3 K5/ft					
LN KIPS/ft					
FR 20000 MB 30					
DL -40					
UT -1					
PK 1	TM-PEAK				
F1 500					
F2 213					
A1 999					
A2 1185					
	TS 12	B	PD: 47436-075	LP 0.00 ft	
	TB 8.0	T1 9.4	2L/C 4.7 UA 1000	UE 1022	LI 1.0

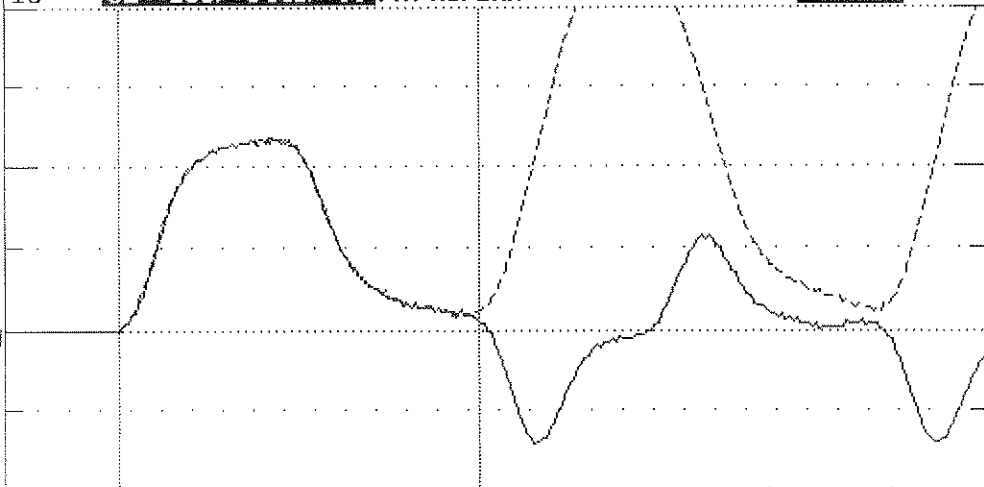

UMX= 3.8 FMX= 59 AMX= 110
 EMX= 0.2 MEX= 115 FUP= 1.00

ACCEPT SQ-OFF FL-OFF PR-OFF

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 47436

CALIBRATION FACTOR: 1185 G/v

BAK (*5000) + _____ DATE: 20-Mar-14

PDA OPERATOR: Erik Sapp

OP: erik [ver:4.05] **ATTN: PIEZOELECTRIC**

contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

←-AT:PIEZORESISTIVE

