

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics  
2018-06-05 11:58

FS —  
10

BN 3653  
SL 1684/ 3440/ 99

PJ:  
PN: HOPBAR

TG F2 -- US  
A2 F2 3.3

LE 17.0 ft  
AR 1.7 in2  
EM 30000 Ksi  
SP 0.492 K/ft3  
WS 16810 ft/s  
WC 7234 ft/s


JC 0.40  
FM 1.00  
UM 1.00

EA/C 30.3 Ks/ft  
UN KIPS\*0.1  
FR 20000 MB 90

DL -41  
UT -1 IP 0.00  
PK 1 TM-PEAK


F1 500  
F2 213  
A1 999  
A2 1170

TS 12 B PD: 47437-075 LP 0.00 ft  
TB 8.0 T1 9.4 2L/C 4.7 UA 1000 UE 1024 LI 1.0

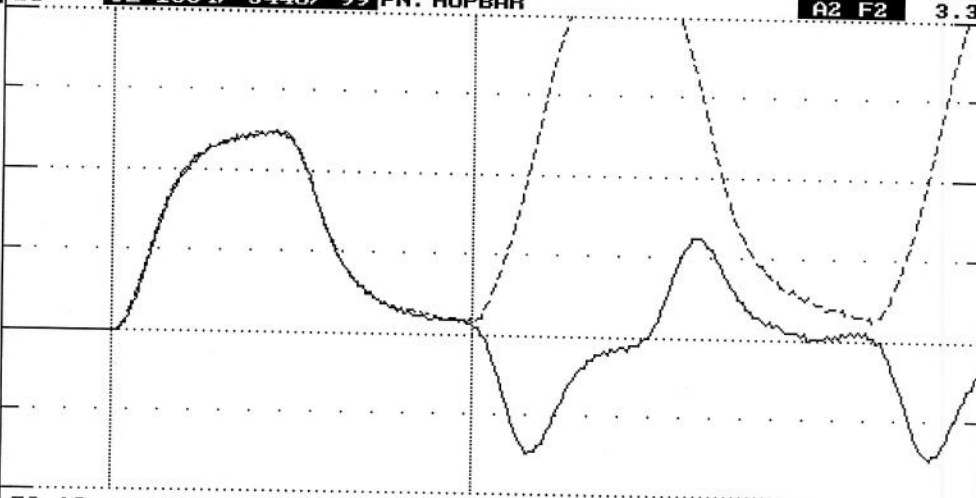

ACCEPT SQ-OFF FL-OFF PR-OFF

ACCEPT



UMX= 4.3 FMX= 63 AMX= 120  
EMX= 0.2 MEX= 123 FUP= 1.01

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 47437

CALIBRATION FACTOR: 1170 G/V

PAK (\*5000): DATE: 6JUNE18

PDA OPERATOR: [Signature]

<-AT:PIEZORESISTIVE

OP: laine [ver:5.01]

AT:PIEZOELECTRIC->