


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

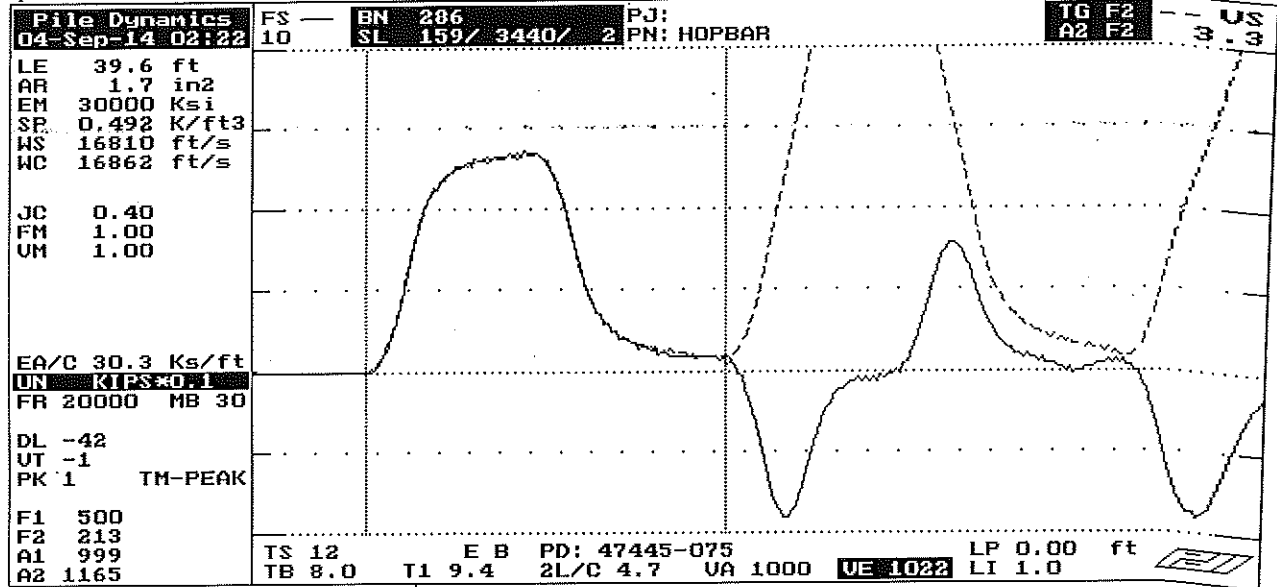

<input type="checkbox"/> ACCEPT <input type="checkbox"/> SQ-OFF <input type="checkbox"/> FL-OFF <input type="checkbox"/> PR-OFF	UMX= 4.4 FMX= 68 AMX= 139 EMX= 0.3 MEX= 133 FUP= 1.01
<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 47445 CALIBRATION FACTOR: 1165 %/V PAK (*5000): _____ DATE: 49 SEPT 14 PDA OPERATOR: <i>M. Wang</i> OP: Iaine Iver:4.051

Smart Sensor

Smart Chip Programmed By J.M.N. on 9 SEPT 14 CRC Value 3C19