


QBTA: DN [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

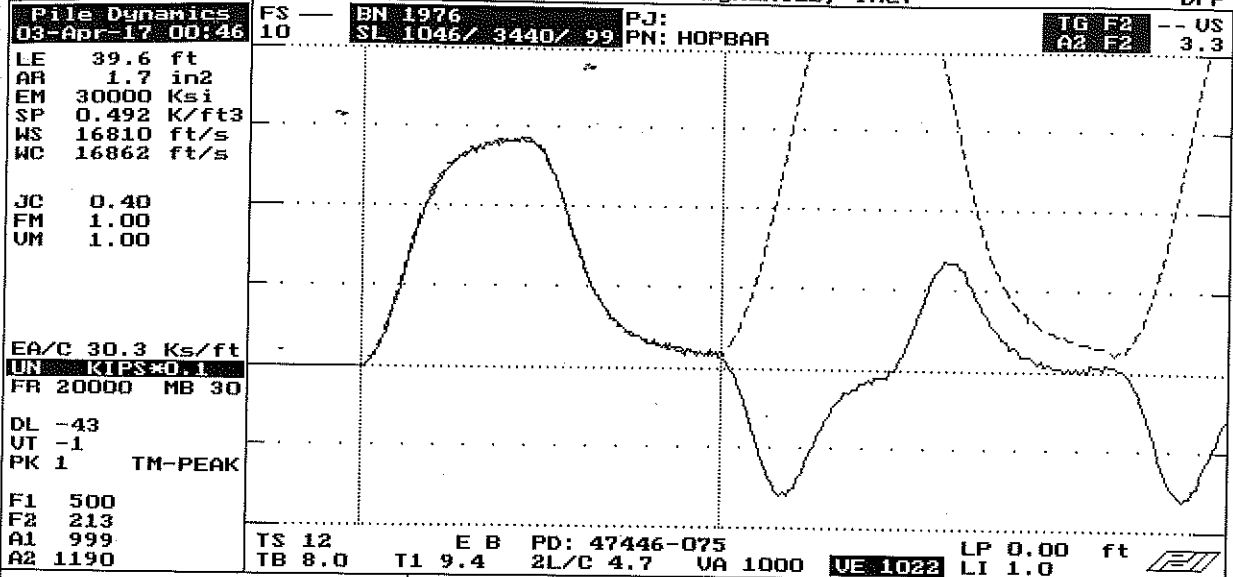

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.6 FMX= 72 AMX= 139 EMX= 0.3 MEX= 141 FVP= 0.98	
<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	ACCELEROMETER CALIBRATION N.I.S.T. Traceable	
	SERIAL NUMBER: 47446	
	CALIBRATION FACTOR: 1190 %/V	
	PAK (<5000>): DATE: SAPR17	
PDA OPERATOR: <i>Jan</i>		
<-AT:PIEZORESISTIVE	OP: laine Iver:4.051	AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on SAPR17 CRC Value 14AB