


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

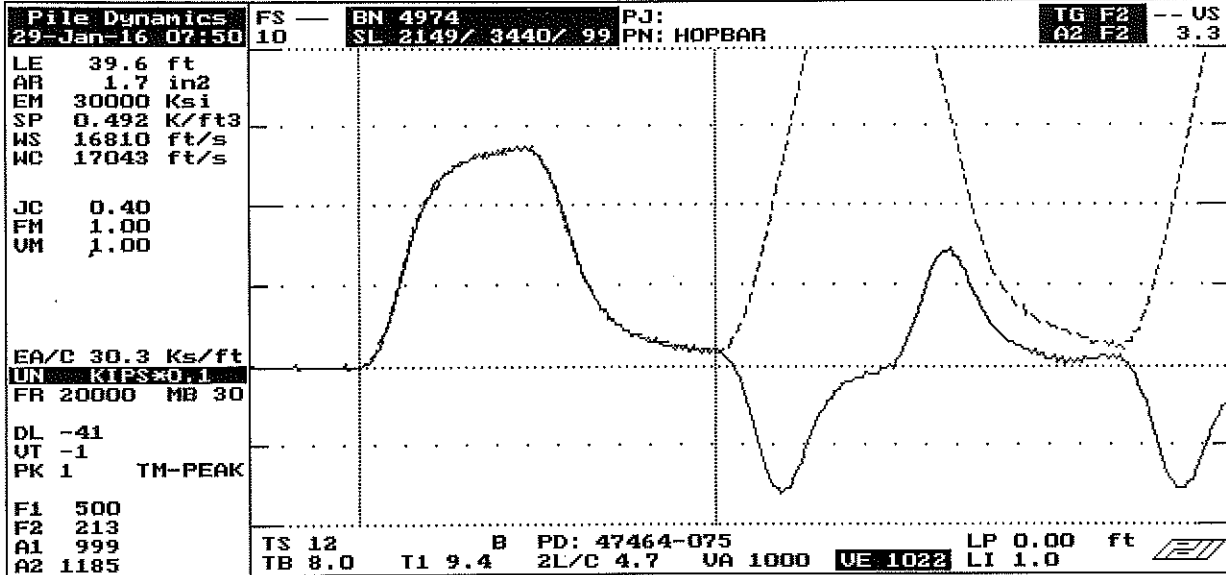

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.4	FMX= 69	AMX= 129
	EMX= 0.3	MEX= 135	FVP= 1.00
		ACCELEROMETER CALIBRATION N.I.S.T. Traceable	
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916		SERIAL NUMBER: 47464 CALIBRATION FACTOR: 1185 % PAK (*5000): DATE: 4 FEB 16 PDA OPERATOR: <i>Ja</i>	

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->