


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

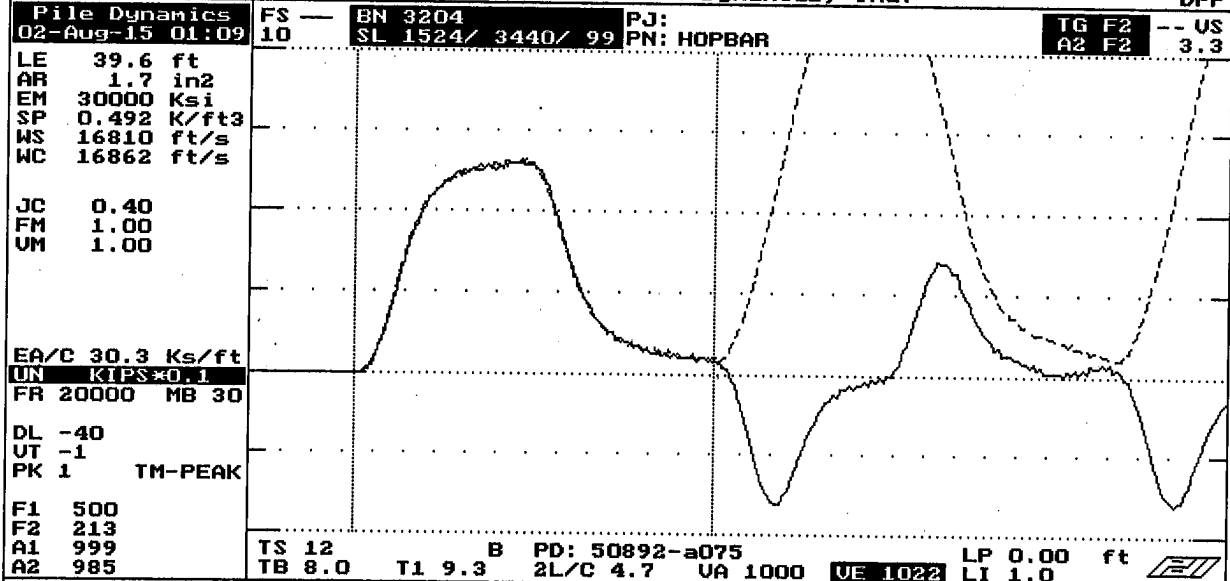

UMX= 4.2 FMX= 66 AMX= 129  
EMX= 0.3 MEX= 129 FVP= 1.00

**ACCEPT SQ-OFF FL-OFF PR-OFF**

contact Pile Dynamics USA  
with your questions  
tel USA - 216 - 831- 6131  
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 50892 PE

CALIBRATION FACTOR: 985 G/v

PAK-(#5000): \_\_\_\_\_ DATE: 2-Aug-15

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: date [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By DB on 4-Aug-15 CRC Value 5389