


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

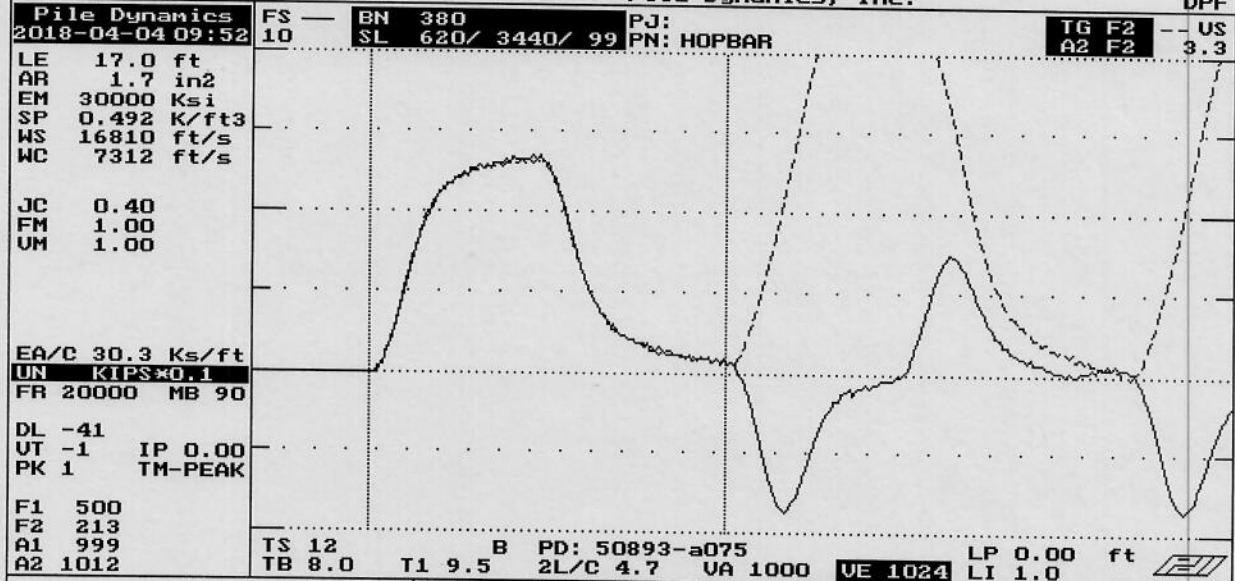

ACCEPT SQ-OFF FL-OFF PR-OFF ACCEPT 	VMX= 4.2 FMX= 67 AMX= 129 EMX= 0.3 MEX= 131 FVP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 50893 CALIBRATION FACTOR: 1012 G/V PAK (*5000): DATE: 4 APR 18 PDA OPERATOR: <i>[Signature]</i>
---	---

<-AT:PIEZORESISTIVE

OP: Iaine [ver:5.01]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By T.W. on 4 APR 18 CRC Value DC6F