


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

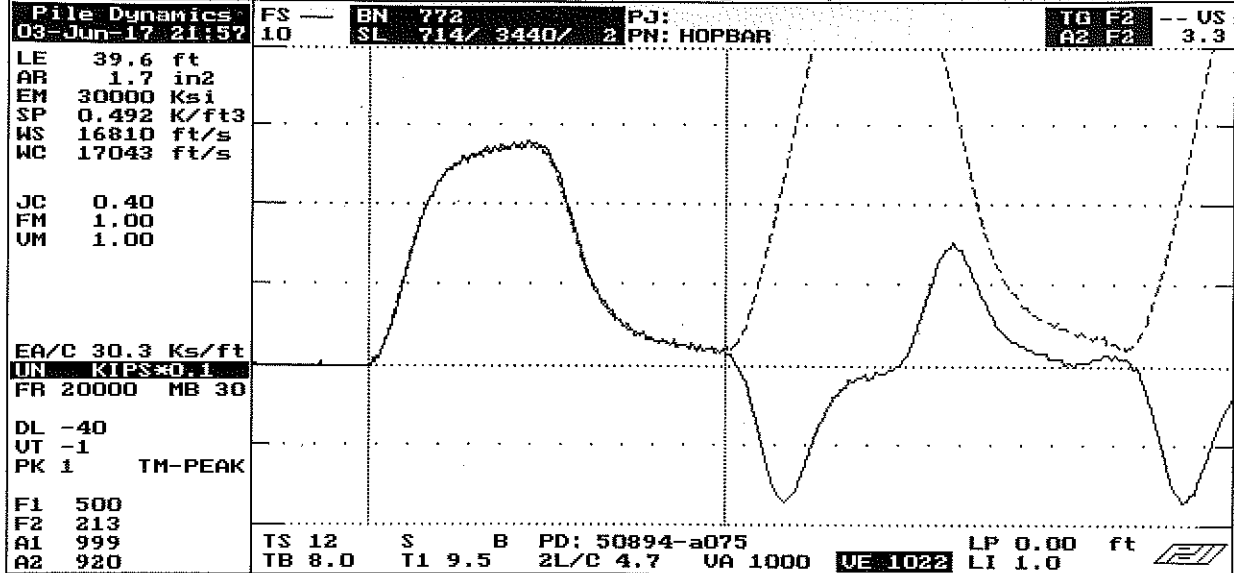

ACCEPT SQ-OFF FL-OFF PR-OFF	VMX= 4.4	FMX= 70	AMX= 139
	EMX= 0.3	MEX= 137	FVP= 1.01
<p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	ACCELEROMETER CALIBRATION		N.I.S.T. Traceable
	SERIAL NUMBER: 50894		
	CALIBRATION FACTOR: 920%		
	PAK (*5000):		DATE: 6JUNE17
PDA OPERATOR: <i>[Signature]</i>			
<-AT:PIEZORESISTIVE		OP: laine [ver:4.05]	AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By J.M.W. on 6JUNE17 CRC Value BBAA