

QBTA: ON IALT-F1/BB=601

Pile Dynamics, Inc.

DPF

Pile Dynamics
21-Mar-15 01:56

FS —
10

BN 2133
SL 1035/ 3440/ 99

PN: HOPBAR

TG F2 -- US
A2 F2 3.3


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s

JC 0.40
FM 1.00
VM 1.00

EA/C 30.3 Ks/ft
UN KIPS:0.1
FR 20000 MB 30

DL -42
VT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 965

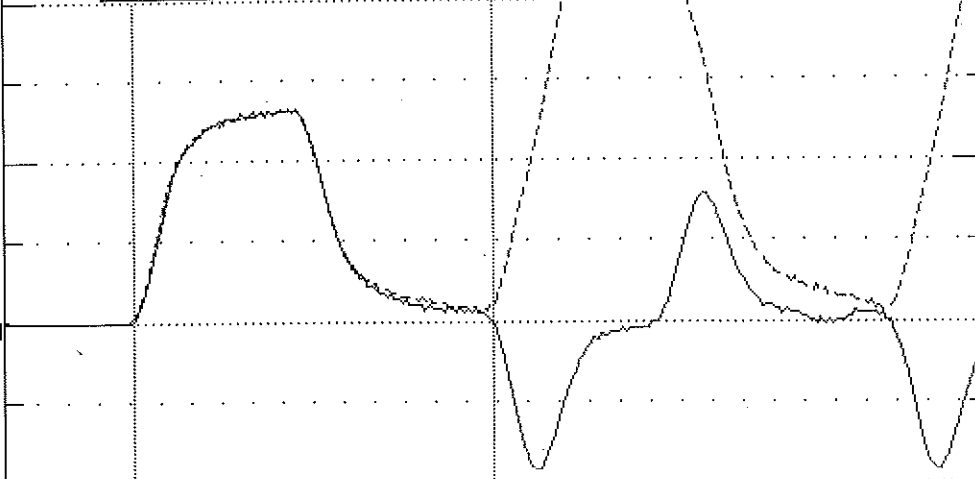

TS 12 B PD: 50901-a075 LP 0.00 ft
TB 8.0 T1 9.7 2L/C 4.7 VA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.3 FMX= 66 AMX= 139
EMX= 0.3 MEX= 129 FUP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 50901

CALIBRATION FACTOR: 965%

PAK-(*5000): DATE: 24/MAR/15

PDA OPERATOR: M. W. W. [Signature]

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By M. W. W. on 24/MAR/15 CRC Value 9F1E