



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

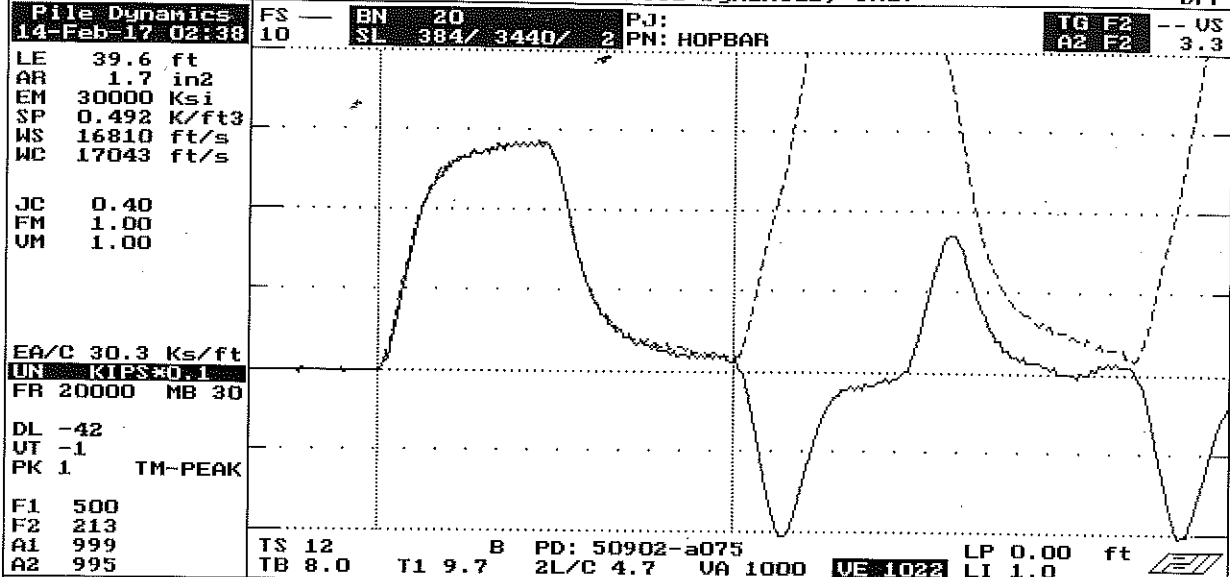

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	VMX= 4.6 FMX= 72 AMX= 149 EMX= 0.3 MEX= 141 FUP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 50902 CALIBRATION FACTOR: 995 % PAK (*5000): DATE: 14Feb17 PDA OPERATOR: <i>[Signature]</i> OP: Iaine Iver:4.051
--	---

Smart Sensor

Smart Chip Programmed By J.M.W. on 14Feb17 CRC Value 2A25