

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
19-Apr-15 01:20

FS — BN 3513
10 SL 1484/ 3440/ 2

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3


LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s

JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS±0.1
FR 20000 MB 30

DL -36
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 1005

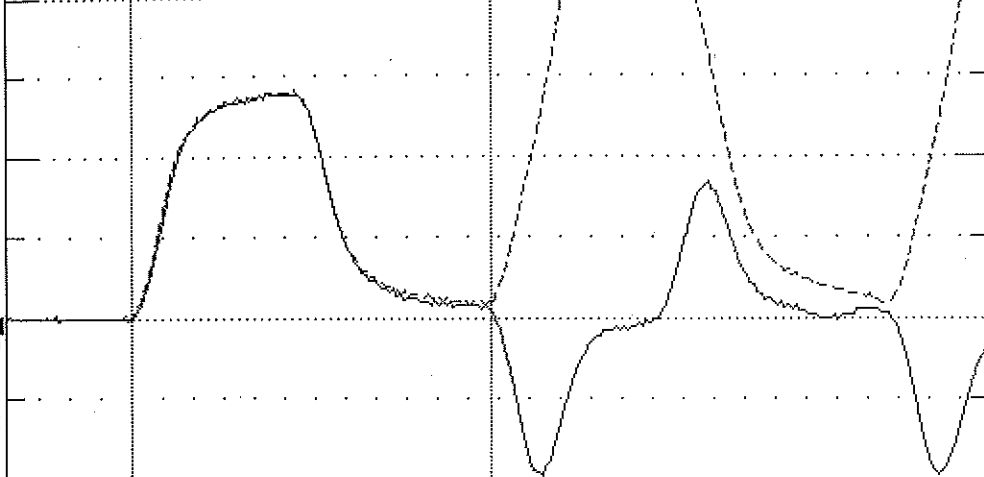

TS 12 B PD: 50904-a075 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 VA 1000 UE 1022 LI 1.0

UMX= 4.6 FMX= 70 AMX= 149
EMX= 0.3 MEX= 137 FUP= 1.00

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 50904

CALIBRATION FACTOR: 1005 %

PAK (*5000): DATE: 22APR15

PDA OPERATOR: M. Wright

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->