

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
19-Apr-15 01:59

FS 10

BN 3542
SL 1490/ 3440/ 99

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3

LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s


JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS:30.1
FR 20000 MB 30

DL -41.
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 965

TS 12 B PD: 50906-a075 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 UA 1000 VE 1022 LI 1.0

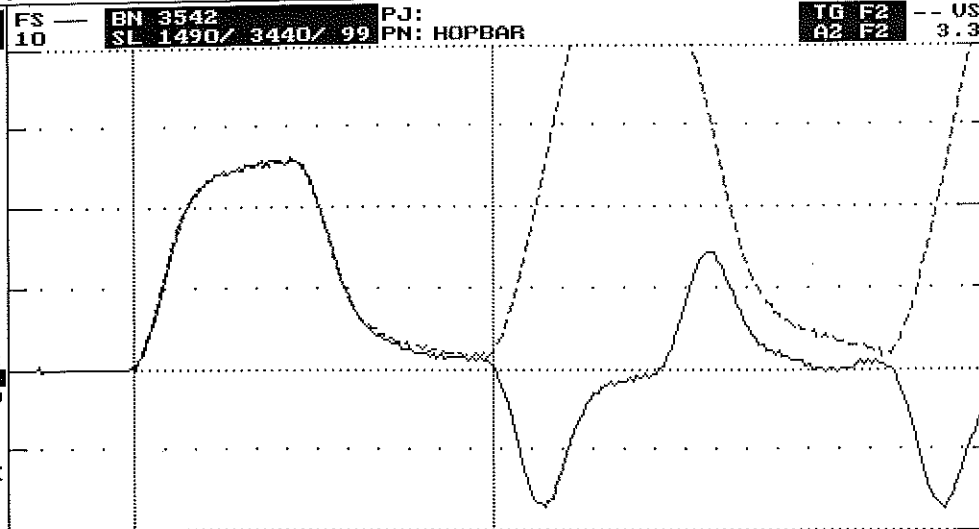

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

<-AT:PIEZORESISTIVE

VMX= 4.2 FMX= 65 AMX= 129
EMX= 0.3 MEX= 127 FUP= 1.00

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 50906

CALIBRATION FACTOR: 965%

PAK <{*5000*}: DATE: 22 APR 15

PDA OPERATOR: *A. M. Wright*

OP: Iaine Iver:4.051

PIEZOELECTRIC