


QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

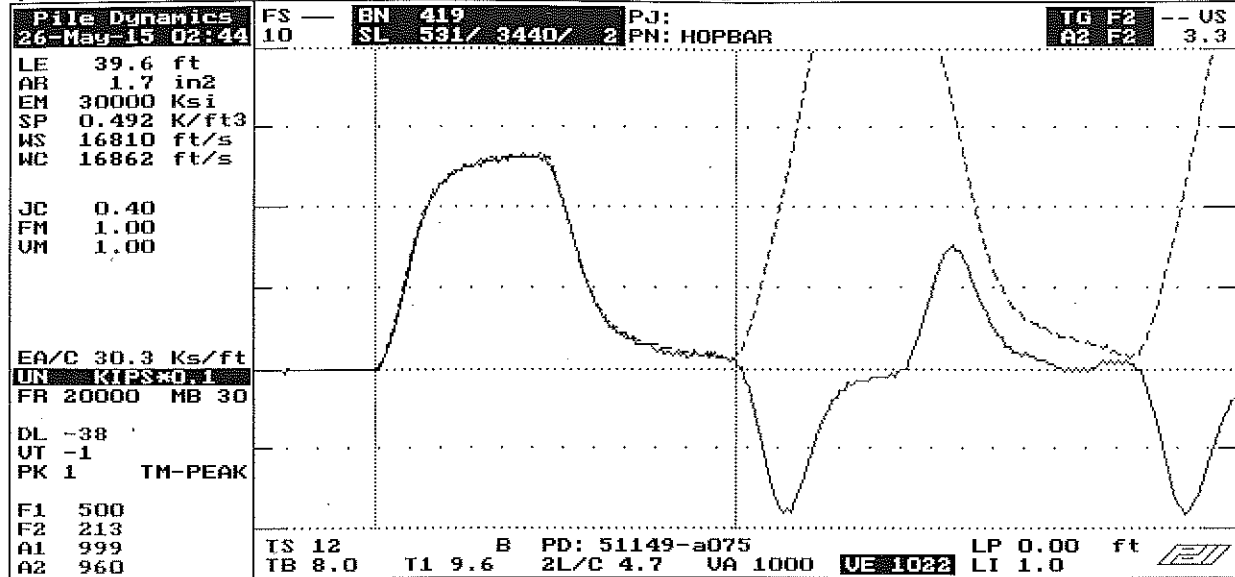

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.4	FMX= 66	AMX= 149
	EMX= 0.3	MEX= 129	FVP= 1.00
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable		
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 51149		
	CALIBRATION FACTOR: 960%		
	PAK (*5000): DATE: 26MAY15		
	PDA OPERATOR: M. W. W. J.		
<-AT:PIEZORESISTIVE	OP: Iaine Iver:4.051	AT:PIEZOELECTRIC->	

Smart Sensor

Smart Chip Programmed By M. W. W. on 26MAY15 CRC Value EFCB