



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

File Dynamics	FS —	BN 426	PJ:	TG F2 -- US
26-May-15 02:49	10	SL 533/ 3440/ 99	PN: HOPBAR	A2 F2 3.3
LE 39.6 ft				
AR 1.7 in2				
EM 30000 Ksi				
SP 0.492 K/ft3				
WS 16810 ft/s				
WC 16862 ft/s				
JC 0.40				
FM 1.00				
VM 1.00				
EA/C 30.3 Ks/ft				
UN <del>KIPS</del> 0.1				
FR 20000 MB 30				
DL -43				
UT -1				
PK 1 TM-PEAK				
F1 500	TS 12	B PD: 51150-a075	LP 0.00 ft	
F2 213	TB 8.0	T1 9.6 2L/C 4.7	VA 1000 UE 1022	LI 1.0
A1 999				
A2 915				

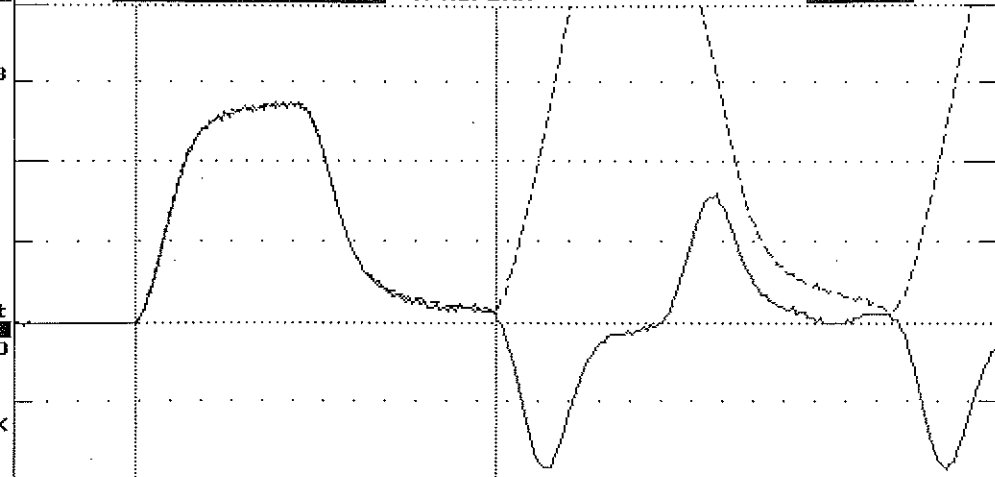

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.5	FMX= 69	AMX= 139
	EMX= 0.3	MEX= 135	FUP= 0.99
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable		
contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	SERIAL NUMBER: 51150		
	CALIBRATION FACTOR: 915g/v		
	PAK (<5000>): DATE: 26MAY15		
	PDA OPERATOR: J.M.W.		
<-AT:PIEZORESISTIVE	OP: Iaine Iver:4.051	PIEZOELECTRIC->	

Smart Sensor

Smart Chip Programmed By J.M.W. on 26MAY15 CRC Value 1882