



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics		FS —	BN 4242	PJ:	TG F2 -- US
28-Apr-15 04:08		10	SL 1716 / 3440 / 99	PN: HOPBAR	A2 F2 3.3
LE	39.6 ft				
AR	1.7 in2				
EM	30000 Ksi				
SP	0.492 K/ft3				
WS	16810 ft/s				
WC	16862 ft/s				
JC	0.40				
FM	1.00				
VM	1.00				
EA/C 30.3 Ks/ft					
UN KIPSEC.1					
FR 20000 MB 30					
DL	-39				
UT	-1				
PK	1 TM-PEAK				
F1	500				
F2	213				
A1	999				
A2	990				
TS 12		B	PD: 51168-a075	LP 0.00 ft	
TB 8.0		T1 9.6	2L/C 4.7	VA 1000	UE 1022 LI 1.0

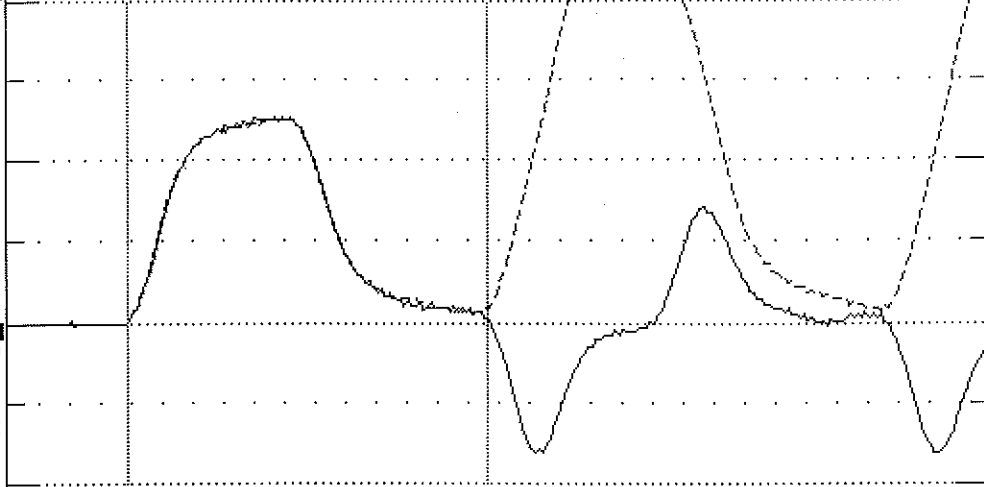

ACCEPT SQ-OFF FL-OFF PR-OFF		UMX= 4.1		FMX= 64		AMX= 139	
		EMX= 0.2		MEX= 125		FVP= 1.01	
 <p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>		ACCELEROMETER CALIBRATION N.I.S.T. Traceable					
		SERIAL NUMBER: 51168					
		CALIBRATION FACTOR: 990 %/V					
		PAK (*5000):				DATE: 1MAY15	
		PDA OPERATOR: <i>J.M.W.</i>					
<-AT:PIEZORESISTIVE		OP: laine Iver:4.051				[AT:PIEZOELECTRIC->	

Smart Sensor

Smart Chip Programmed By J.M.W. on 1MAY15 CRC Value 8912