

QBTA: ON IALT-F1/BB=601

Pile Dynamics, Inc.

DPF

File Dynamics
 28-Apr-15 03:50
 LE 39.6 ft
 AR 1.7 in2
 EM 30000 Ksi
 SP 0.492 K/ft3
 WS 16810 ft/s
 WC 16862 ft/s

FS — BN 4218
 10 SL 1716/ 3440/ 99

PJ:
 PN: HOPBAR


TG F2 -- US
 A2 F2 3.3

JC 0.40
 FM 1.00
 VM 1.00

EA/C 30.3 Ks/ft
 UN KIPS*0.1
 FR 20000 MB 30

DL -42
 UT -1
 PK 1 TM-PEAK

F1 500
 F2 213
 A1 999
 A2 1035

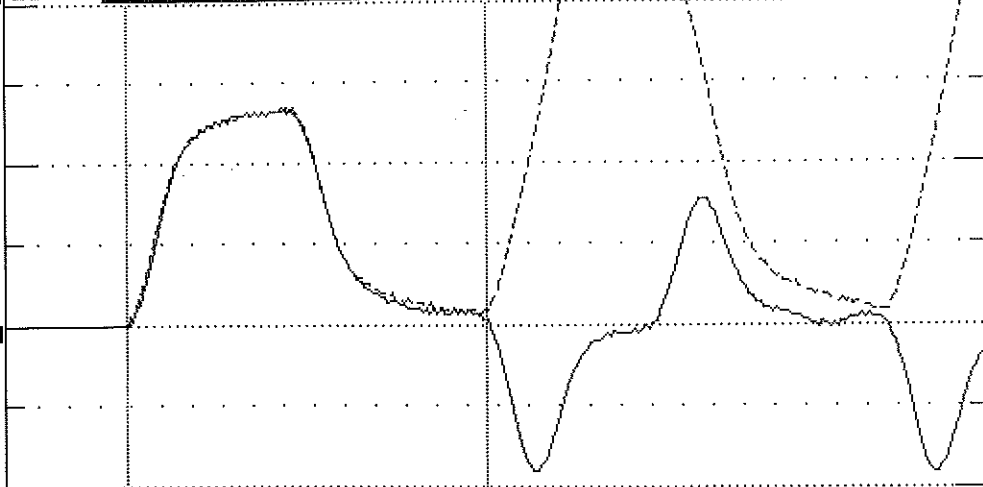

TS 12 B PD: 51571-a075 LP 0.00 ft
 TB 8.0 T1 9.6 2L/C 4.7 VA 1000 UE 1022 LI 1.0

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
 with your questions
 tel USA - 216 - 831- 6131
 fax USA - 216 - 831- 0916

VMX= 4.4 FMX= 68 AMX= 139
 EMX= 0.3 MEX= 133 FUP= 0.99

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 51571

CALIBRATION FACTOR: 1035 %

PAK (*5000): DATE: 1 MAY 15

PDA OPERATOR: *[Signature]*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By *[Signature]* on 1 MAY 15 CRC Value 7DE1