


QBTA: ON IALT-F1/BB=601

Pile Dynamics, Inc.

DPF

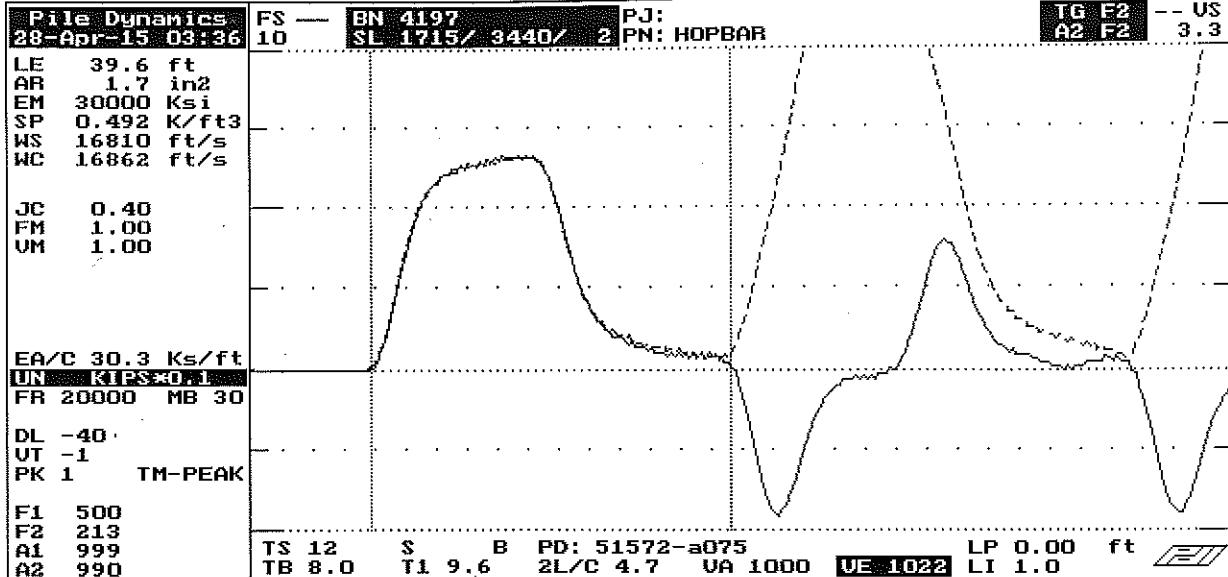

ACCEPT SQ-OFF FL-OFF PR-OFF   contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	UMX= 4.3 FMX= 66 AMX= 139 EMX= 0.3 MEX= 129 FUP= 0.99 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 51572 CALIBRATION FACTOR: 990% PAK (*5000): DATE: 1MAY15 PDA OPERATOR: <i>[Signature]</i>
---------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<-AT:PIEZORESISTIVE OP: Iainc [ver:4.05] AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By *[Signature]* on 1MAY15 CRC Value 4BDF