



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

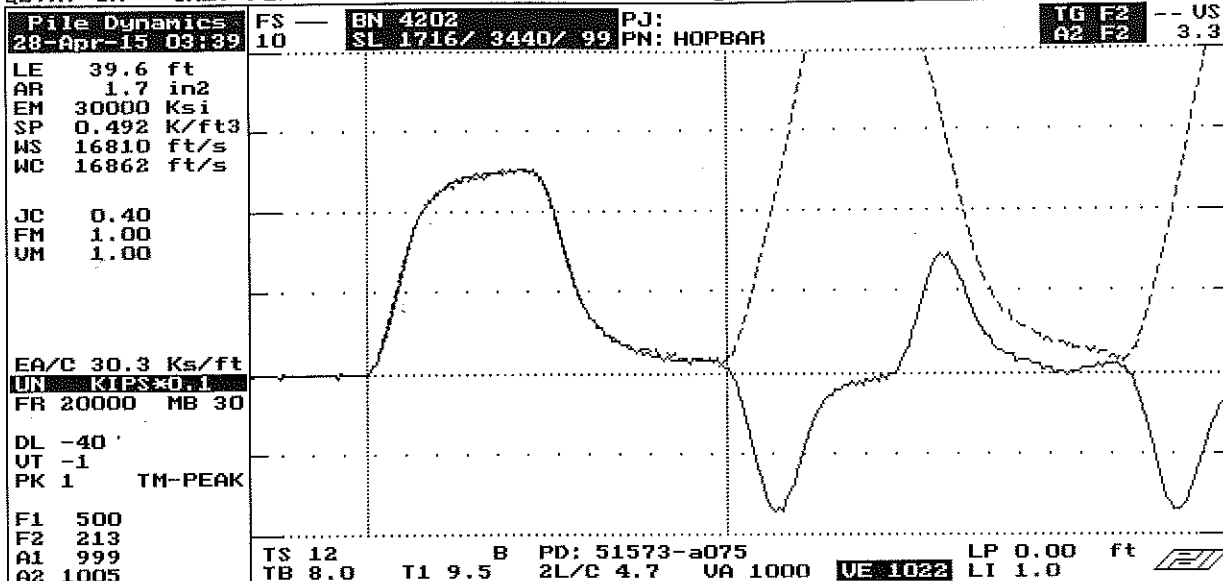

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916 <-AT:PIEZORESISTIVE	VMX= 4.1 FMX= 64 AMX= 139 EMX= 0.2 MEX= 125 FVP= 1.01 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 51573 CALIBRATION FACTOR: 1005% PAK (*5000): DATE: 1 MAY 15 PDA OPERATOR: <i>M. W. Wright</i> OP: laine Iver:4.051 <AT:PIEZOELECTRIC->
---	--

Smart Sensor

Smart Chip Programmed By M.W. on 1 MAY 15 CRC Value 3EED