



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

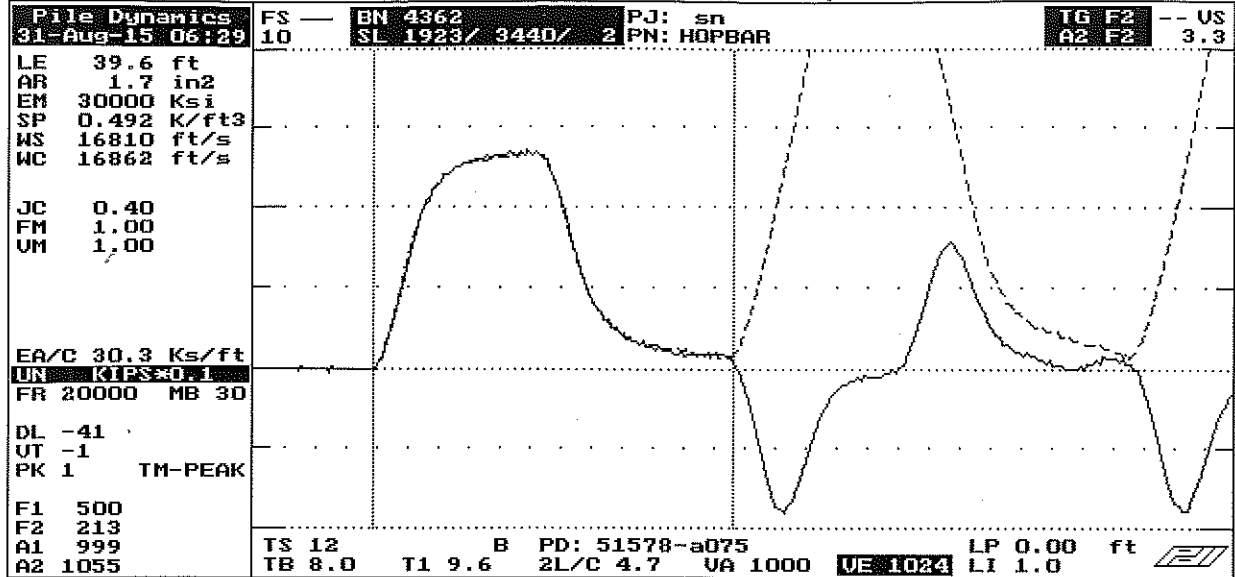

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.4	FMX= 68	AMX= 139
	EMX= 0.3	MEX= 133	FVP= 1.00
 <p>contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916</p>	ACCELEROMETER CALIBRATION		N.I.S.T. Traceable
	SERIAL NUMBER: 51578		
	CALIBRATION FACTOR: 1055%/v		
	PAK (*5000):		DATE: 33EPT15
PDA OPERATOR: <i>[Signature]</i>			
←AT:PIEZORESISTIVE		OP: Iaine [ver:4.05]	AT:PIEZOELECTRIC→

Smart Sensor

Smart Chip Programmed By *[Signature]* on 33EPT15 CRC Value 8784