



QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

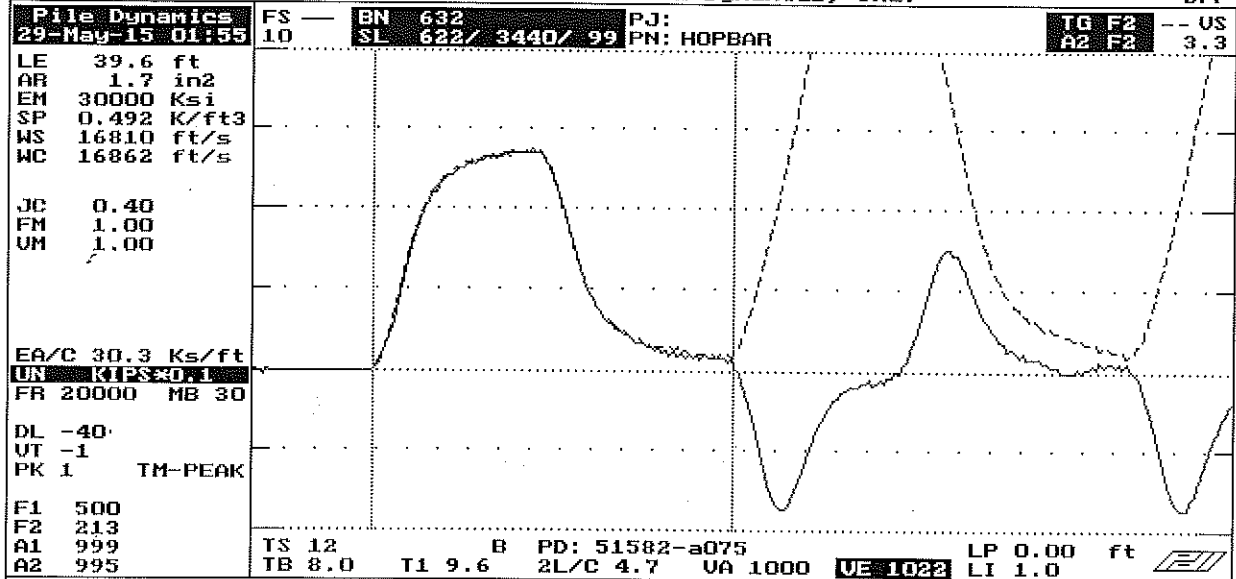

ACCEPT SQ-OFF FL-OFF PR-OFF  contact Pile Dynamics USA with your questions tel USA - 216 - 831- 6131 fax USA - 216 - 831- 0916	UMX= 4.4 FMX= 68 AMX= 139 EMX= 0.3 MEX= 133 FUP= 1.00 ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: <u>51582</u> CALIBRATION FACTOR: <u>995%</u> PAK (#5000) : _____ DATE: <u>29 MAY 15</u> PDA OPERATOR: <u>M. W. W.</u> OP: laine lver:4.051 AT:PIEZOELECTRIC
---	--

<-AT:PIEZORESISTIVE

OP: laine lver:4.051

AT:PIEZOELECTRIC->