

QBTA: ON [ALT-F1/BB=60]

Pile Dynamics, Inc.

DPF

Pile Dynamics
28-Apr-15 08:56

FS —
10

BN 4227
SL 1716/ 3440/ 99

PJ:
PN: HOPBAR

TG F2 -- US
A2 F2 3.3

LE 39.6 ft
AR 1.7 in2
EM 30000 Ksi
SP 0.492 K/ft3
WS 16810 ft/s
WC 16862 ft/s


JC 0.40
FM 1.00
UM 1.00

EA/C 30.3 Ks/ft
UN KIPS=0.1
FR 20000 MB 30

DL -42
UT -1
PK 1 TM-PEAK

F1 500
F2 213
A1 999
A2 950

TS 12 B PD: 51598-a075 LP 0.00 ft
TB 8.0 T1 9.6 2L/C 4.7 VA 1000 UE 1022 LI 1.0

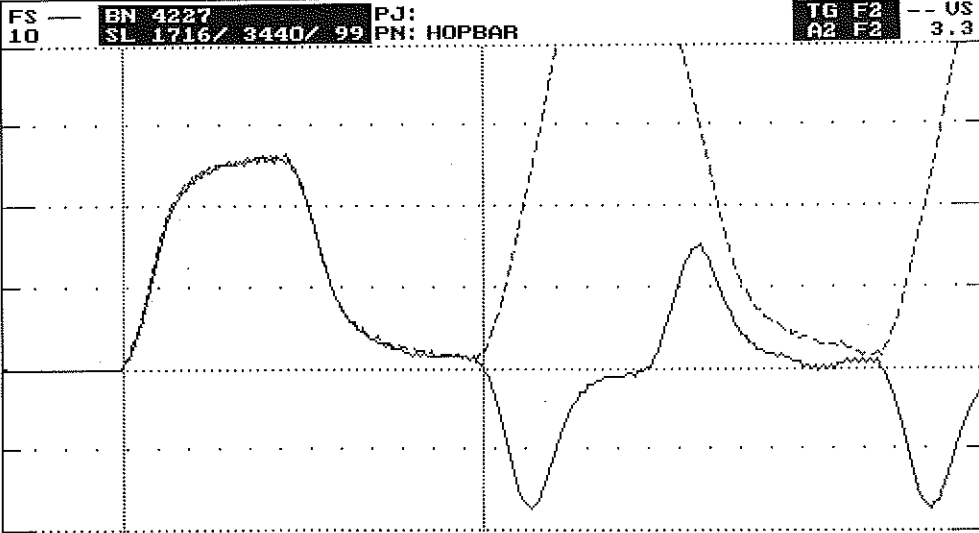

ACCEPT SQ-OFF FL-OFF PR-OFF



contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916

VMX= 4.3 FMX= 66 AMX= 139
EMX= 0.3 MEX= 129 FVP= 0.97

ACCELEROMETER CALIBRATION N.I.S.T. Traceable

SERIAL NUMBER: 51598

CALIBRATION FACTOR: 950%

PAK (*5000): DATE: 1 MAY 15

PDA OPERATOR: *X.M.W.*

<-AT:PIEZORESISTIVE

OP: laine [ver:4.05]

AT:PIEZOELECTRIC->

Smart Sensor

Smart Chip Programmed By *X.M.W.* on 1 MAY 15 CRC Value 3B0A