



OBTA: ON [ALT-F1/BB=601

Pile Dynamics, Inc.

DPF

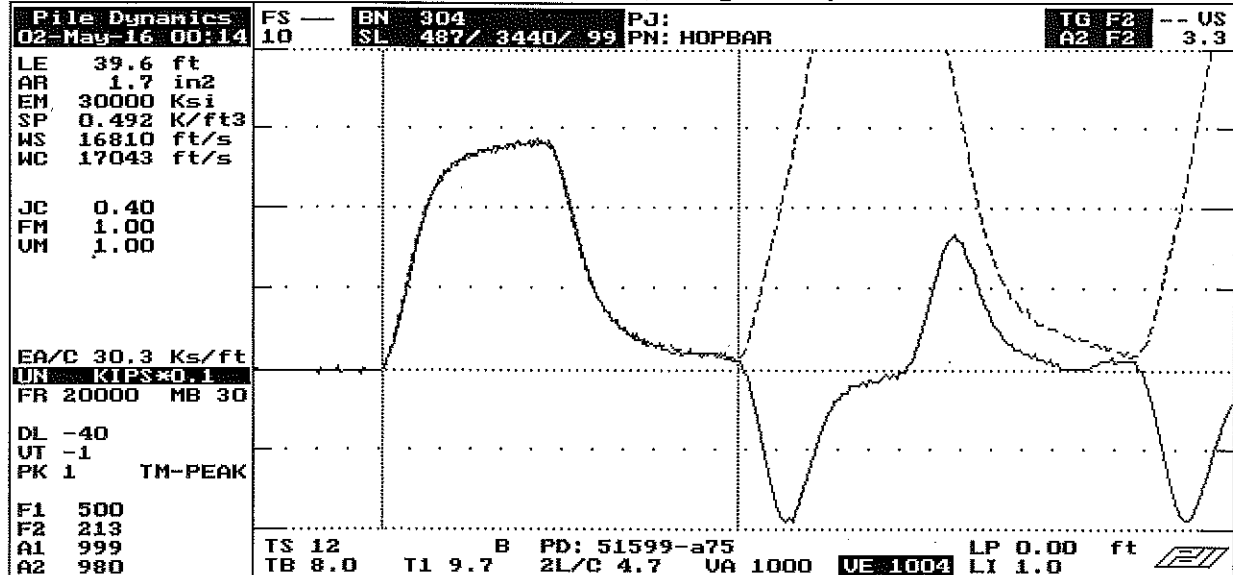

ACCEPT SQ-OFF FL-OFF PR-OFF	UMX= 4.6 FMX= 72 AMX= 149 EMX= 0.3 MEX= 141 FUP= 1.00
	ACCELEROMETER CALIBRATION N.I.S.T. Traceable SERIAL NUMBER: 51599 CALIBRATION FACTOR: 980 g/v PAK (*5000): DATE: 2 MAY 16 PDA OPERATOR: <i>gast</i>
<-AT:PIEZORESISTIVE	OP: laine [ver:4.05] AT:PIEZOELECTRIC->

contact Pile Dynamics USA
with your questions
tel USA - 216 - 831- 6131
fax USA - 216 - 831- 0916